

MN-3253/MN-3253T

Distributed Motionnet 32-ch Isolated DI Module



Features:

RoHS

- Maximum communication speed: 20 Mbps
- 32-ch isolated digital inputs
- Each Motionnet transfer Line: connect modules up to 64
- Designing isolation protection: power, communication, I/O
- LED Diagnostics for communication and I/O status
- Each port can be specified as NPN or PNP (12~24 V)

Introduction:


The **MN-3253(T)** is an I/O expansion device for Motionnet systems, and is equipped with **32** isolated digital input channels. Each Motionnet communication line can be connected to up to 64 modules, meaning that the I/O can be expanded to up to 2048 input channels. The communication time required by each **MN-3253(T)** is 15.1 us. If 64 modules have been connected, signals for 2048 points on 64 modules can be sent and received within 0.97 msec. The update of the I/O status is completed automatically through the Motionnet system at a constant interval, and setting interrupts for specific input points that the customer wants to monitor can help prevent CPU time from being wasted by repetitive polling when there is nothing else for the issuing process to do. Each input port can be specified as either NPN or PNP ($12\sim24$ V).

Specifications:

Digital Input		
Input Channels	32	
Input Type	Sink/Source (NPN/PNP)	
On Voltage Level	+10 ~ 30 VDC	
Off Voltage Level	+3 VDC max.	
Input Impedance	4.7K Ohm	
Isolation Voltage	3000 Vrms	
Interface		
LED Indicators	Communication state (Link, Error) Input/output state Internal 3.3 V Power Termination resistor switch	
Communication Speed	Selectable 2.5, 5, 10 or 20 Mbps by DIP Switch.	
Cyclic Scan Time	15.1 µs per device (20 Mbps)	
Communication Connector	MN-3253: RJ-45 x 2 MN-3253T: 5-pin terminal block	
I/O Connector	13-Pin pluggable Terminal block x 4	

Power				
Voltage Range	24 VDC (1000 V isolated)			
Power Consumption	2 W max.			
Protection	Reverse voltage and overcurrent protection			
Connection	7-pin removable terminal block			
Mechanical				
Case	Plastic			
Dimensions (W x H x D)	31 mm x 140 mm x 126.6 mm			
Installation	DIN-Rail mounting			
Environmental				
Operating Temperature	0 ~ + 60°C			
Storage Temperature -20 ~ +80°C				
Operating Humidity	10 ~ 85%; Non-condensing			
Storage Humidity	5 ~ 95%; Non-condensing			

Pin Assignments:

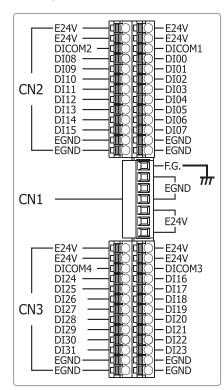


Dimensions: (Units: mm)

-31.0

00000

147.0--140.0-

NO.Pin DefineSpecificationsI/O DefineCN1 Pin Assignments1FGFrame Ground- $2 \sim 4$ EGNDExternal GroundInput $5 \sim 7$ E24VExternal GroundInputCN2A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Input 3 DICOM1Common terminal of DI00~DI07Input $4 \sim 11$ DI00~DI07Digital input channels 00~07Input $1 \sim 2$ E24VExternal GroundConnect to CN1 3 DICOM1Common terminal of DI08~DI07Input $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 $1 \sim 2$ E24VExternal GroundConnect to CN1 $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 3 DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $1 \sim 2$ E24VExternal GroundConnect to CN1 $2 \sim 13$ EGNDExternal 24V(+)Connect to CN1 3 DICOM3Common terminal of DI16~DI23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $1 \sim 13$ EGNDExternal GroundConnect to CN1 $2 \sim 13$ EGNDExternal GroundConnect to CN1 $1 \sim 2$ E24VExternal GroundConnect to CN1 <t< th=""><th></th><th></th><th></th><th></th></t<>						
1FGFrame Ground- $2 \sim 4$ EGNDExternal GroundInput $5 \sim 7$ E24VExternal 24V(+)InputCN2A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM1Common terminal of DI00~DI07Input $4 \sim 11$ DI00~DI07Digital input channels 00~07Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CONnect to CN1CN2B (Left) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN1COnnect to CN13DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $12 \sim 13$ EGNDExternal GroundConnect to CN1Connect to CN13DICOM2Common terminal of DI16~DI231 ~ 2 E24VExternal 24V(+)Connect to CN1Connect to CN13DICOM3Common terminal of DI16~DI231 ~ 2 E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	NO.	Pin Define	Specifications	I/O Define		
24EGNDExternal GroundInput57E24VExternal 24V(+)InputCN2A (Right) Pin Assignments12E24VExternal 24V(+)Connect to CN13DICOM1Common terminal of DI00~DI07Input411DI00~DI07Digital input channels 00~07Input1213EGNDExternal GroundConnect to CN1CN2B (Left) Pin Assignments12E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input411DI08~DI15Digital input channels 08~15Input1213EGNDExternal GroundConnect to CN13DICOM2Common terminal of DI08~DI15Input1213EGNDExternal GroundConnect to CN1COnnect to CN13DICOM3Common terminal of DI16~DI231 ~ 2 E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input411DI16~DI23Digital input channels 16~23Input12<13EGNDExternal GroundConnect to CN1411DI16~DI23Digital input channels 16~23Input12<13EGNDExternal GroundConnect to CN1CN3B (Left) Pin AssignmentsConnect to CN1CN1	CN1 Pin Assignments					
$5 \sim 7$ E24VExternal 24V(+)InputCN2A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM1Common terminal of DI00~DI07Input $4 \sim 11$ DI00~DI07Digital input channels 00~07Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN2B (Left) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $12 \sim 13$ EGNDExternal GroundConnect to CN13DICOM2Common terminal of DI08~DI15Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3A (Right) Pin AssignmentsI 2 E24V $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input $1 \sim 2$ E24VExternal GroundConnect to CN13DICOM3External GroundConnect to CN14 ~ 11 DI16~DI23Digital input channels 16~23Input12 ~ 13 EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignm	1	FG	Frame Ground	-		
CN2A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM1Common terminal of DI00~DI07Input $4 \sim 11$ DI00~DI07Digital input channels 00~07Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN2B (Left) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3A (Right) Pin AssignmentsIConnect to CN1 $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 $1 \sim 2$ EQ4VExternal GroundConnect to CN1 $1 \sim 2$ EQ4VExternal GroundConnect to CN1 $1 \sim 2$ EQ4VExternal 24V(+)Connect to CN1 $2 \sim 13$ EGND	2~4	EGND	External Ground	Input		
$1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM1Common terminal of DI00~DI07Input $4 \sim 11$ DI00~DI07Digital input channels 00~07Input $12 \sim 13$ EGNDExternal GroundConnect to CN1 CN2B (Left) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $12 \sim 13$ EGNDExternal GroundConnect to CN1 CN3A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 3 DICOM3Common terminal of DI16~DI23Input $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 CN3A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN1 3 DICOM3Common terminal of DI16~DI23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $12 \sim 13$ EGNDExternal GroundConnect to CN1 CN3B (Left) Pin Assignments	5~7	E24V	External 24V(+)	Input		
3DICOM1Common terminal of DI00~DI07Input $4 \sim 11$ DI00~DI07Digital input channels 00~07Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN2B (Left) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3B (Left) Pin AssignmentsInputConnect to CN1	CN2A (Right) Pin Assignments					
$4 \sim 11$ DI00~DI07Digital input channels 00~07Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN2B (Left) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input $4 \sim 11$ DI08~DI15Digital input channels 08~15Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3A (Right) Pin Assignments $1 \sim 2$ E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input $4 \sim 11$ DI16~DI23Digital input channels 16~23Input $12 \sim 13$ EGNDExternal GroundConnect to CN1CN3B (Left) Pin AssignmentsExternal GroundConnect to CN1	1~2	E24V	External 24V(+)	Connect to CN1		
12 ~ 13EGNDExternal GroundConnect to CN1CN2B (Left) Pin Assignments $1 ~ 2$ E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input $4 ~ 11$ DI08~DI15Digital input channels 08~15Input $12 ~ 13$ EGNDExternal GroundConnect to CN1CN3A (Right) Pin Assignments $1 ~ 2$ E24VExternal 24V(+) 3 DICOM3Common terminal of DI16~DI23 $1 ~ 2$ E24VExternal 24V(+)Connect to CN1 3 DICOM3Common terminal of DI16~DI23Input $4 ~ 11$ DI16~DI23Digital input channels 16~23Input $12 ~ 13$ EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	3	DICOM1	Common terminal of DI00~DI07	Input		
CN2B (Left) Pin Assignments1 ~ 2E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input4 ~ 11DI08~DI15Digital input channels 08~15Input12 ~ 13EGNDExternal GroundConnect to CN1CN3A (Right) Pin Assignments1 ~ 2E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input4 ~ 11DI16~DI23Digital input channels 16~23Input12 ~ 13EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	4 ~ 11	DI00~DI07	Digital input channels 00~07	Input		
1 ~ 2E24VExternal 24V(+)Connect to CN13DICOM2Common terminal of DI08~DI15Input4 ~ 11DI08~DI15Digital input channels 08~15Input12 ~ 13EGNDExternal GroundConnect to CN1CN3A (Right) Pin Assignments1 ~ 2E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input4 ~ 11DI16~DI23Digital input channels 16~23Input12 ~ 13EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	12 ~ 13	EGND	External Ground	Connect to CN1		
3 DICOM2 Common terminal of DI08~DI15 Input 4 ~ 11 DI08~DI15 Digital input channels 08~15 Input 12 ~ 13 EGND External Ground Connect to CN1 CN3A (Right) Pin Assignments 1 ~ 2 E24V External 24V(+) Connect to CN1 3 DICOM3 Common terminal of DI16~DI23 Input 4 ~ 11 DI16~DI23 Digital input channels 16~23 Input 12 ~ 13 EGND External Ground Connect to CN1 CMMON terminal of DI16~DI23 12 ~ 13 EGND External Ground Connect to CN1 CN3B (Left) Pin Assignments	CN2B (Left) Pin Assignments					
4 ~ 11DI08~DI15Digital input channels 08~15Input12 ~ 13EGNDExternal GroundConnect to CN1CN3A (Right) Pin Assignments1 ~ 2E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input4 ~ 11DI16~DI23Digital input channels 16~23Input12 ~ 13EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	1~2	E24V	External 24V(+)	Connect to CN1		
12 ~ 13EGNDExternal GroundConnect to CN1CN3A (Right) Pin AssignmentsConnect to CN11 ~ 2E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input4 ~ 11DI16~DI23Digital input channels 16~23Input12 ~ 13EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	3	DICOM2	Common terminal of DI08~DI15	Input		
CN3A (Right) Pin Assignments 1 ~ 2 E24V External 24V(+) Connect to CN1 3 DICOM3 Common terminal of DI16~DI23 Input 4 ~ 11 DI16~DI23 Digital input channels 16~23 Input 12 ~ 13 EGND External Ground Connect to CN1 CN3B (Left) Pin Assignments External Ground Connect to CN1	4 ~ 11	DI08~DI15	Digital input channels 08~15	Input		
1 ~ 2E24VExternal 24V(+)Connect to CN13DICOM3Common terminal of DI16~DI23Input4 ~ 11DI16~DI23Digital input channels 16~23Input12 ~ 13EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	12 ~ 13	EGND	External Ground	Connect to CN1		
3 DICOM3 Common terminal of DI16~DI23 Input 4 ~ 11 DI16~DI23 Digital input channels 16~23 Input 12 ~ 13 EGND External Ground Connect to CN1 CN3B (Left) Pin Assignments Connect to CN1	CN3A (Right) Pin Assignments					
4 ~ 11DI16~DI23Digital input channels 16~23Input12 ~ 13EGNDExternal GroundConnect to CN1CN3B (Left) Pin Assignments	1~2	E24V	External 24V(+)	Connect to CN1		
12 ~ 13 EGND External Ground Connect to CN1 CN3B (Left) Pin Assignments	3	DICOM3	Common terminal of DI16~DI23	Input		
CN3B (Left) Pin Assignments	4 ~ 11	DI16~DI23	Digital input channels 16~23	Input		
	12 ~ 13	EGND	External Ground	Connect to CN1		
	CN3B (Left) Pin Assignments					
$1 \sim 2$ E24V External 24V(+) Connect to CN1	1~2	E24V	External 24V(+)	Connect to CN1		
3 DICOM4 Common terminal of DI24~DI31 Input	3	DICOM4	Common terminal of DI24~DI31	Input		
4 ~ 11 DI24~DI31 Digital input channels 24~31 Input	4 ~ 11	DI24~DI31	Digital input channels 24~31	Input		
12 ~ 13EGNDExternal GroundConnect to CN1	12 ~ 13	EGND	External Ground	Connect to CN1		

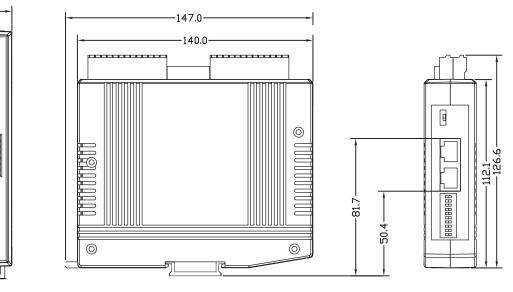

Front View

Right Side View

Top View

Ordering Information/Accessories:

Model No.	Description	
MN-3253 CR	Distributed Motionnet 32-ch Isolated DI Module with RJ-45 Connector (RoHS)	
MN-3253T CR	Distributed Motionnet 32-ch Isolated DI Module with Terminal Block (RoHS)	
PISO-MN200(T/EC) CR	PCI Bus, Dual-Line Motionnet Master Control Card (RoHS)	
MN-SERVO Series CR MN-SERVO -EC Series CR	Distributed Motionnet Single-axis Motion Control Modules (with Spring Type Terminal Blocks; EC: with e-CON Mini-Clamp Connector) (RoHS)	
MN-2091U CR MN-2091U-T CR	Distributed Motionnet Single-axis Universal Motion Control Module (RoHS)	