

SFP-10G-S40(-T)-TAA

10 GIGABIT FIBER SFP+ MODULE WITH TAA COMPLIANT

FEATURES

- SFP+ Multi-Source Agreement Compliant
- LC Duplex Receptacle
- Up to 40km on 9/125µm SMF
- 10Gbps IEEE 802.3 10GBASE-ER and 10GBASE-EW Compliant
- SFF-8472 Diagnostic Monitoring Interface for Optical Transceivers
- Alarms and Warnings to Indicate Status of Real Time Monitors
- Class 1 Laser Safety Standard IEC 60825 Compliant
- TAA Compliant
- 5-Year Warranty




INTRODUCTION

The SFP-10G-S40(-T)-TAA is specifically designed for the high performance integrated duplex data link over single mode optical fiber. This transceiver module is compliant with the Small Form-factor Pluggable Plus (SFP+) Multisource Agreement (SFF-8432). An enhanced Digital Diagnostic Monitoring Interface has been incorporated into the SFP Transceiver. Real time monitors of temperature, supply voltage, laser bias current, laser average output power and received output power are provided, based on the SFF-8472.

The SFP-10G-S40(-T)-TAA transceivers using a 1550nm long wavelength EML enables data transmission up to 40km on a single mode optical fiber.

BLOCK DIAGRAM

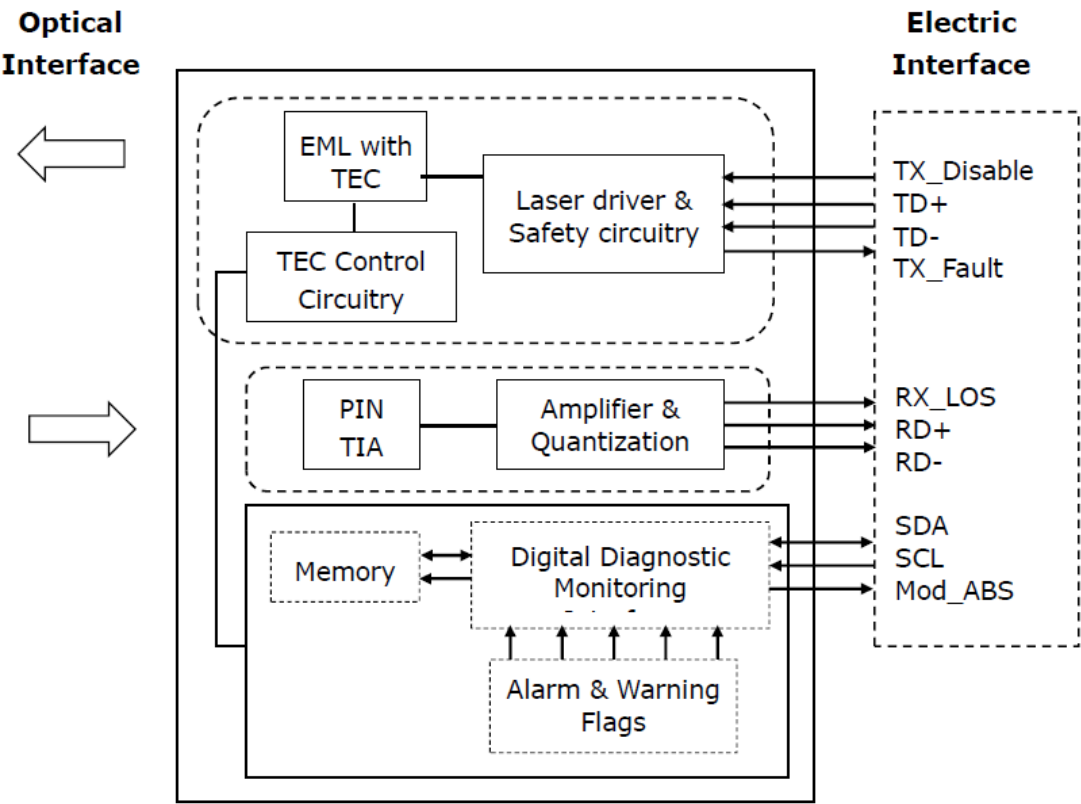

The transceiver fundamentally consists of two parts: transmitter and receiver. The transmitter features a TTL logic level Disable signal and a Fault indicator. The receiver features a TTL logic Loss of Signal (RX_LOS) detection. The serial ID interface defines a 256-byte memory map in Memory, accessible over a 2 wire, serial interface at the 8 bit address 1010000X (A0h). The Digital Diagnostic Monitoring Interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged and is therefore backward compatible. The detailed signal descriptions are listed in the following sections.

SPECIFICATIONS

Absolute Maximum Ratings					
Parameter	Symbol	Minimum	Maximum	Unit	Note
Storage Temperature	Ts	-40	85	°C	
Supply Voltage	VccT VccR	-0.5	4.5	V	
Storage Relative Humidity	RH	5	95	%	

Recommended Operating Conditions						
Parameter	Symbol	Minimum	Type	Maximum	Unit	Note
Case Operating Temperature	Tc	0		70	°C	Refer to Ordering Information
		-40		85		
Supply Voltage	Vcc	3.14	3.3	3.46	V	
Supply Current	ITX + I_RX			450	mA	1

- Notes:
1. Power consumption never exceeds 1.5W.

Transmitter Electro-Optical Interface

Parameter	Symbol	Minimum	Type	Maximum	Unit	Note
Transmitter Differential Input Voltage	TD+/-	150		1200	mV(p-p)	
TX_Disable - High	V _{DISABLE_H}	2		V _{cc}	V	
TX_Disable - Low	V _{DISABLE_L}	V _{ee}		V _{ee} +0.8	V	
TX_Fault - High	V _{FAULT_H}	2		V _{cc}	V	
TX_Fault - Low	V _{FAULT_L}	V _{ee}		V _{ee} +0.8	V	
Average Launch Power	P _O	-4.7		4.0	dBm	1
Launch Power in OMA	P _{O_OMA}	-1.7			dBm	1
Optical Extinction Ratio	E _R	3.0			dB	
Center Wavelength	λ _c	1530		1565	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Transmitter and Dispersion Penalty	TDP			3	dB	
Relative Intensity Noise	RIN _{12OMA}			-128	dB/Hz	

Notes:

1. Coupling into a 9/125μm single mode fiber.

Receiver Electro-Optical Interface

Parameter	Symbol	Minimum	Type	Maximum	Unit	Note
Receiver Differential Output Voltage	RD +/-	300		1000	mV(p-p)	
Receiver Power for Damage				4	dBm	
Average Receiver Power	P _{IN}	-15.8		-1.0	dBm	1
Receiver Sensitivity in OMA	P _{IN_OMA}			-14.1	dBm	1
Operating Center Wavelength	λ _c	1530		1565	nm	
Receiver Reflectance	RL			-26	dB	
Receiver Loss of Signal De-Assert	P _{LOSD}			-16	dBm	
Receiver Loss of Signal Assert	P _{LOSA}	-30			dBm	
Receiver Loss of Signal Hysteresis	P _{LOSH}	0.5			dB	
Receiver Loss of Signal - Low	V _{OL}	-0.3		0.4	V	
Receiver Loss of Signal - High	V _{OH}	2.0		V _{ccR}	V	

Notes:

1. With BER better than or equal to 1×10^{-12} , measured in the center of the eye opening with PRBS $2^{31}-1$

Two-Wire Interface


Parameter	Symbol	Minimum	Maximum	Unit	Note
Host 2-wire V _{cc}	V _{CC_HTWI}	3.14	3.46		1

SCL and SDA	V_{OL}	0.0	0.40	V	2
	V_{OH}	$V_{CC_HTWI}-0.5$	$V_{CC_HTWI}+0.3$		
SCL and SDA	V_{IL}	-0.3	$V_{CC}T*0.3$	V	
	V_{IH}	$V_{CC}T*0.7$	$V_{CC}T + 0.5$		
Input Current on the SCL and SDA Contacts	I_I	-10	10		
Capacitance on SCL and SDA Contacts	C_i		14	pF	3
Total Bus Capacitance for SCL and SDA	C_b		100	pF	4
			290		5
Clock Frequency	f_{SCL}		400	kHz	
Two-Wire Interface Ready	t_{serial}		300	ms	6

Notes:

1. The Host 2-wire Vcc is the voltage used for resistive pull ups for the 2-wire interface.
2. Rp2w pulled toVcc_Host_2w. Rp2w is the pull up resistor. Active bus termination may be used by the host in place of a pullup resistor. Pull ups can be connected to any one of several power supplies, however the host board design shall ensure that no module contact has voltage exceeding module VccT/R +0.5 V nor requires the module to sink more than 3.0 mA current.
3. Ci is the capacitance looking into the module SCL and SDA contacts.
4. At 400 kHz, 3.0 kΩ Rp2w, max; At 100 kHz, 8.0 kΩ Rp2w, max.
5. At 400 kHz, 1.1 kΩ Rp2w, max; At 100 kHz, 2.75 kΩ Rp2w, max.
6. Time from power on until the module is ready for data transmission over the two-wire interface.

DIGITAL DIAGNOSTIC MEMORY MAP

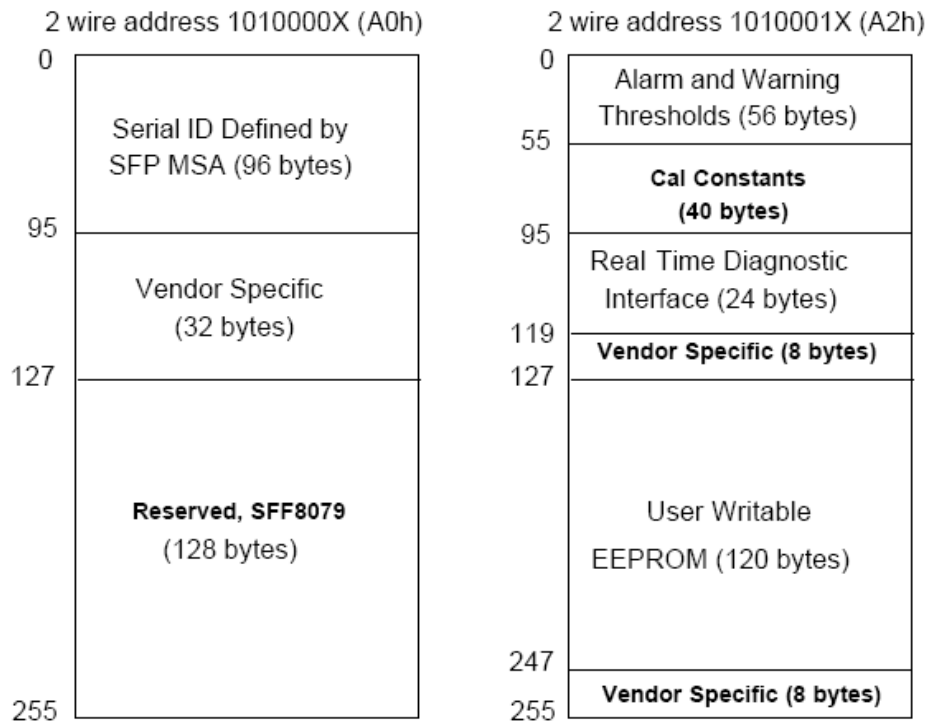


DIGITAL DIAGNOSTIC MONITORING CHARACTERISTICS

Parameter	Symbol	Range	Unit	Unit
Transceiver Temperature	T_{INT}	0 ~ 70 °C / -40 ~ 85 °C	±3	°C

Transceiver Supply Voltage	V_{INT}	3.14 ~ 3.46 V	± 3	%
TX Bias Current	I_{BIAS}	1 ~ 120 mA	± 10	%
TX Output Power	P_{TX}	-1 ~ 4 dBm	± 3	dB
RX Received Optical Power	P_{RX}	-16 ~ -1 dBm	± 3	dB


PIN DESCRIPTION

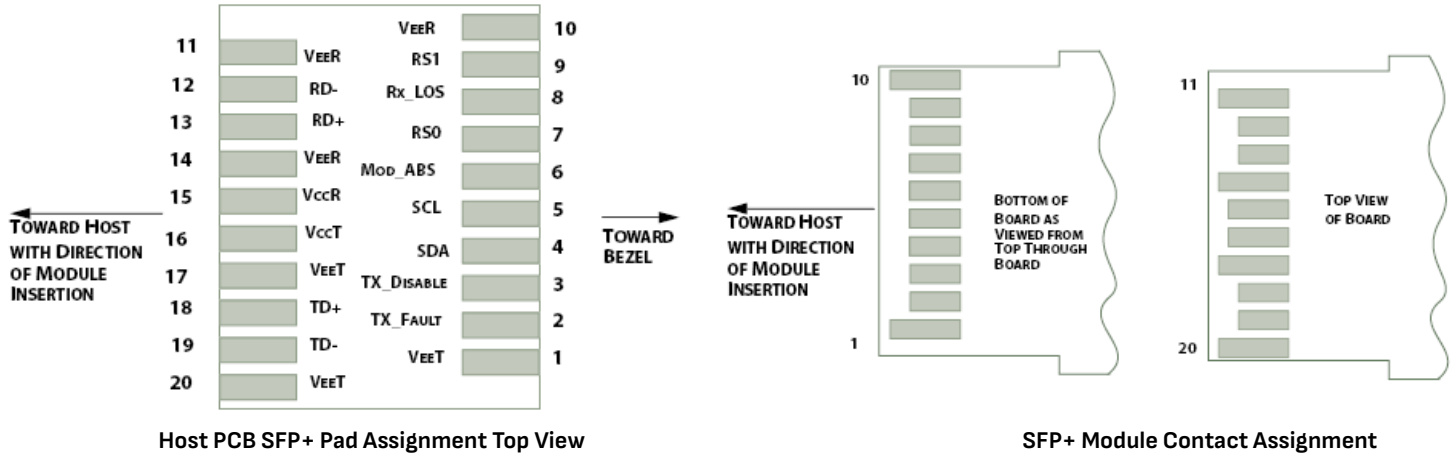

Contacts	Logic	Symbol	Power Sequence Order	Name / Description
1		VeeT	1st	Module Transmitter Ground
2	LVTTL-O	TX_Fault	3rd	Module Transmitter Fault
3	LVTTL-I	TX_Disable	3rd	Transmitter Disable; Turns off transmitter laser output
4	LVTTL-I/O	SDA	3rd	2-wire Serial Interface Data Line (Same as MOD-DEF2 in the INF-8074i)
5	LVTTL-I/O	SCL	3rd	2-wire Serial Interface Clock (Same as MOD-DEF1 in the INF-8074i)
6		Mod_ABS	3rd	Module Absent, connected to VeeT or VeeR in the module
7	LVTTL-I	RS0	3rd	No connection required
8	LVTTL-O	RX_LOS	3rd	Receiver Loss of Signal Indication (In FC designated as RX_LOS and in Ethernet designated as Signal Detect Bar)
9	LVTTL-I	RS1	3rd	No connection required
10		VeeR	1st	Module Receiver Ground
11		VeeR	1st	Module Receiver Ground
12	CML-O	RD-	3rd	Receiver Inverted Data Output
13	CML-O	RD+	3rd	Receiver Non-Inverted Data Output
14		VeeR	1st	Module Receiver Ground
15		VccR	2nd	Module Receiver 3.3V Supply
16		VccT	2nd	Module Transmitter 3.3V Supply
17		VeeT	1st	Module Transmitter Ground
18	CML-I	TD+	3rd	Transmitter Non-Inverted Data Input

19	CML-I	TD-	3rd	Transmitter Inverted Data Input
20		VeeT	1st	Module Transmitter Ground

DIMENSIONS

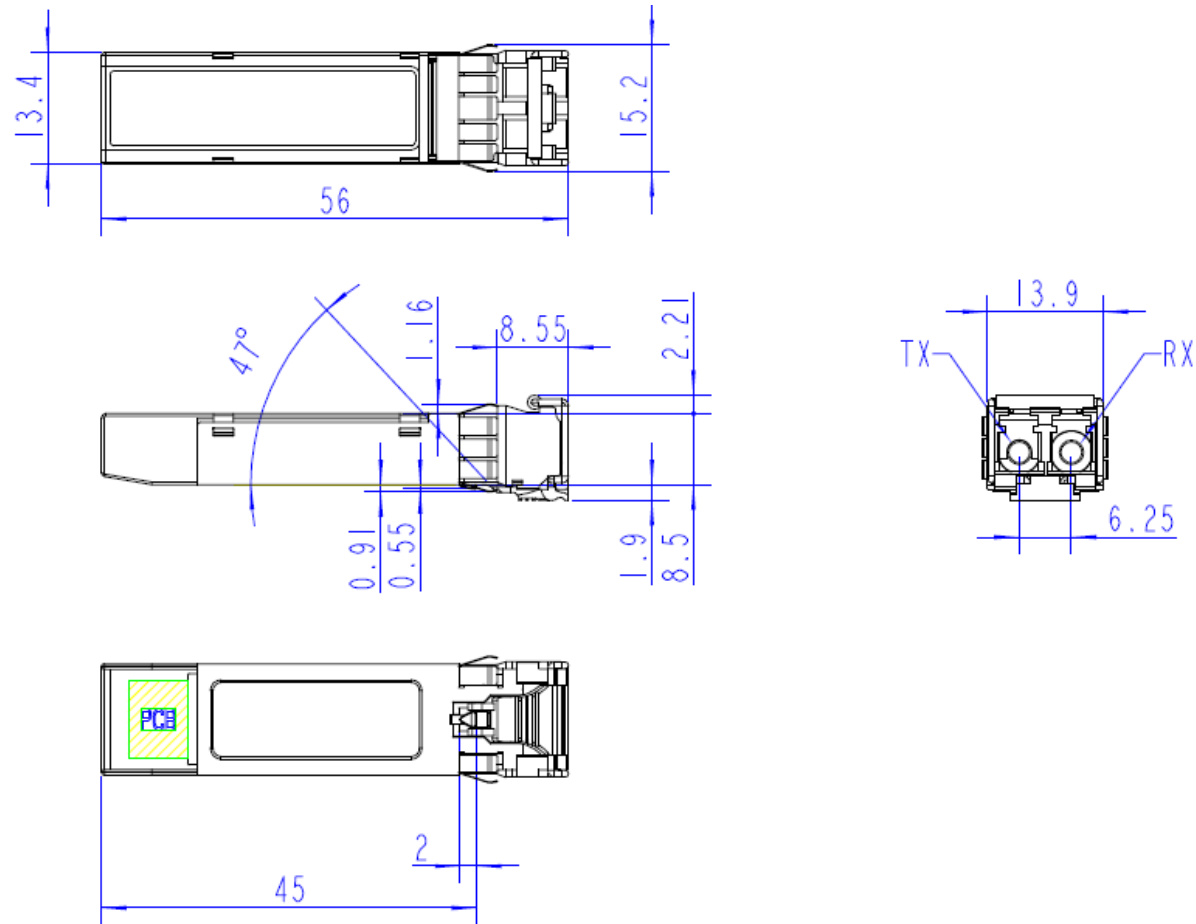

Unit : mm
All dimensions are ± 0.2 mm unless otherwise specified.

ORDERING INFORMATION

SFP Models	
Part Number	Description
SFP-10G-S40-TAA	10G SFP+ Transceiver, Single-Mode 40km / LC / 1550nm, 0~70°C, with TAA Compliant
SFP-10G-S40-T-TAA	10G SFP+ Transceiver, Single-Mode 40km / LC / 1550nm, -40~85°C, with TAA Compliant

© Antaira Technologies, LLC. All rights reserved. 202504
Specifications are subject to change without notice and without incurring any obligation.