

SFP-S10(-T)-TAA

GIGABIT FIBER SFP MODULE WITH TAA COMPLIANT

FEATURES

- SFP Multi-Source Agreement Compliant
- LC Duplex Receptacle
- 1.0625Gbps Fibre Channel FC-PI 100-SM-LC-L Compliant
- 1.25Gbps IEEE 802.3 1000BASE-LX Compliant
- Serial ID Functionality Support
- Single +3.3V Power Supply
- Low Power Dissipation
- Class 1 Laser Safety Standard IEC 825 Compliant
- TAA Compliant




INTRODUCTION

The SFP-S10(-T)-TAA is specifically designed for the high performance integrated duplex data link over single-mode or multimode optical fiber. These transceiver modules are compliant with the SFP Multisource Agreement (MSA). With the hot pluggability, these modules offer an easy way to be installed into SFP MSA compliant ports at any time without the interruption of the host equipment operating online.

The SFP-S10(-T)-TAA transceivers using a long wavelength (1310nm) FP laser diode enable data transmission up to 10 km on a single-mode (9/125µm) optical fiber.

BLOCK DIAGRAM

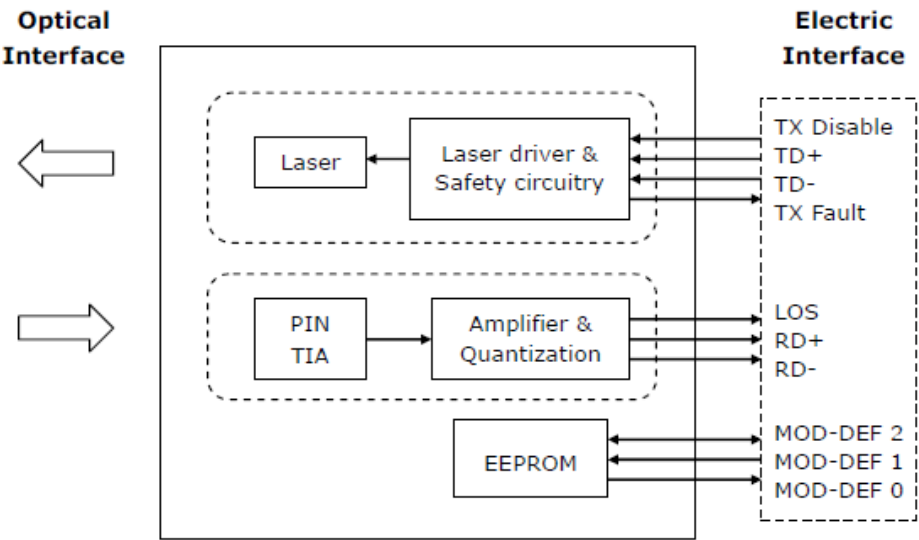

The transceiver fundamentally consisted of two parts: transmitter and receiver. The transmitter features a TTL logic level Disable signal and a Fault indicator. The receiver features a TTL logic Loss of Signal (LOS) detection. For the access of serial identification information, an EEPROM is used to store the required data via the 2-wire serial CMOS EEPROM protocol. The detailed signal descriptions are listed in the following sections.

SPECIFICATIONS

Absolute Maximum Ratings					
Parameter	Symbol	Minimum	Maximum	Unit	Note
Storage Temperature	Ts	-40	85	°C	
Supply Voltage	VccT VccR	-0.5	4.0	V	
Storage Relative Humidity	RH	5	95	%	


Recommended Operating Conditions						
Parameter	Symbol	Minimum	Type	Maximum	Unit	Note
Case Operating Temperature	Tc	0		70	°C	Refer to Ordering Information
		-40		85		
Supply Voltage	Vcc	3.1	3.3	3.5	V	
Supply Current	I _{TX} + I _{RX}		180	300	mA	

Transmitter Electro-Optical Interface						
Parameter	Symbol	Minimum	Type	Maximum	Unit	Note
Transmitter Differential Input Voltage	TD+/-	400		2400	mV	
TX_Disable - High	V _{DISABLE_H}	2		Vcc	V	
TX_Disable - Low	V _{DISABLE_L}	Vee		Vee+0.8	V	
TX_Fault - High	V _{FAULT_H}	2		Vcc	V	

TX_Fault – Low	$V_{\text{FAULT_L}}$	Vee		Vee+0.8	V	
Optical Output Power	P_O	-9.5		-3	dBm	1
Optical Extinction Ratio	E_R	9			dB	
Center Wavelength	λ_c	1260	1310	1360	nm	
Spectral Width (RMS)	$\Delta\lambda$				nm	2
Optical Rise / Fall Time	t_r / t_f			260	ps	3
Relative Intensity Noise	RIN			-120	dB/Hz	
Total Contributed Jitter	TJ			227	ps	

Notes:

1. Coupling into a 9/125 μm single-mode fiber.
2. Compliant with IEEE 802.3

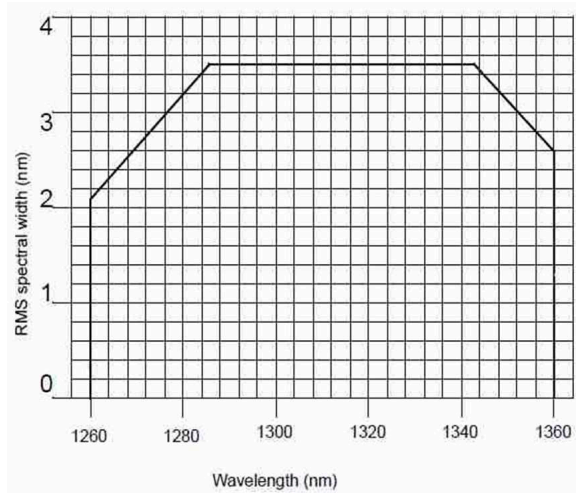

3. 20% to 80% value


Receiver Electro-Optical Interface

Parameter	Symbol	Minimum	Type	Maximum	Unit	Note
Receiver Differential Output Voltage	RD +/-	400		2000	mV	
Receiver Overload	P_{INMAX}	-3				1
Receiver Sensitivity	P_{INMIN}			-20	dBm	1
Operating Center Wavelength	λ_c	1260		1360	nm	
Return Loss	RL	12			dB	
Receiver Loss of Signal – TTL Low	$P_{\text{RX_LOSD}}$			-20	dBm	
Receiver Loss of Signal – TTL High	$P_{\text{RX_LOSA}}$	-35			dBm	
Receiver Loss of Signal – Hysteresis	$P_{\text{RX_LOSH}}$	0.5			dB	

Notes:

1. With BER better than or equal to 1×10^{-12} , measured in the center of the eye opening with PRBS 2^7-1

PIN DESCRIPTION

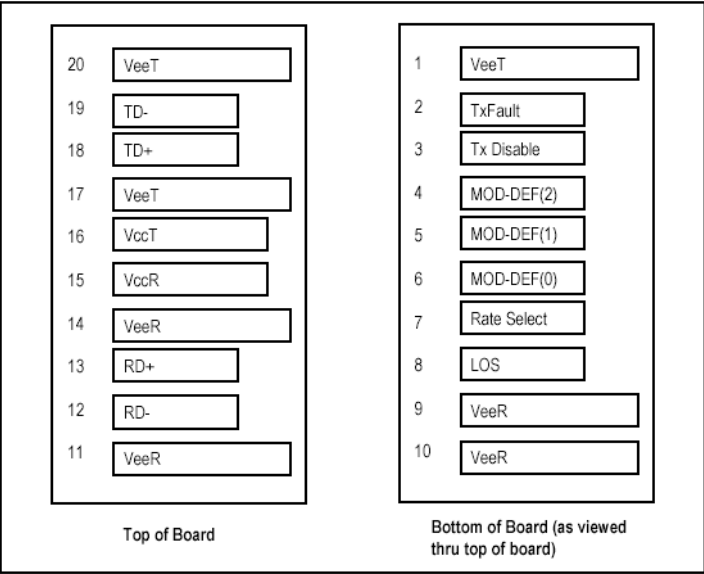

SFP Transceiver Electric Pad Layout

Towards Bezel

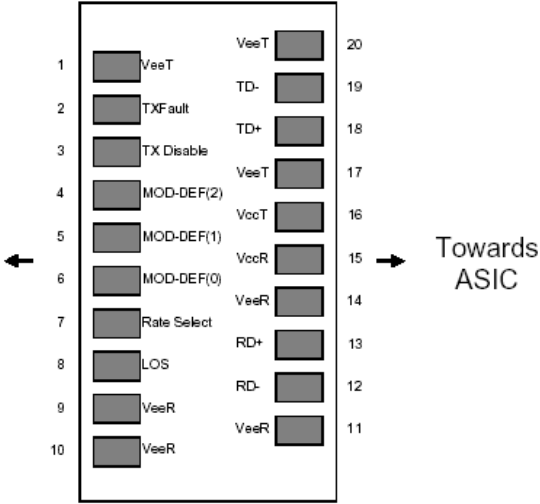


Diagram of Host Board Connector Block Pin Numbers and Names


Pin No.	Pin Name	Function	Plug Sequence	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	1
3	TX Disable	Transmitter Disable	3	2
4	MOD-DEF 2	Module Definition 2	3	3
5	MOD-DEF 1	Module Definition 1	3	3
6	MOD-DEF 0	Module Definition 0	3	3
7	Rate Select	Select Between Full or Reduced Receiver Bandwidth	3	4
8	LOS	Loss of Signal	3	5
9	VeeR	Receiver Ground	1	6
10	VeeR	Receiver Ground	1	6
11	VeeR	Receiver Ground	1	6
12	RD -	Inv. Receiver Data Out	3	7
13	RD +	Receiver Data Out	3	7
14	VeeR	Receiver Ground	1	6
15	VccR	Receiver Power	2	8
16	VccT	Transmitter Power	2	8
17	VeeT	Transmitter Ground	1	6
18	TD +	Transmitter Data In	3	9
19	TD -	Inv. Transmitter Data In	3	9
20	VeeT	Transmitter Ground	1	6

Notes:

Plug Sequence: Pin engagement sequence during hot plugging.

1. TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
2. TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10 KΩ resistor. Its states are:
Low (0 – 0.8V): Transmitter on
(>0.8, < 2.0V): Undefined
High (2.0 – 3.465V): Transmitter Disabled
Open: Transmitter Disabled
3. Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be VccT or VccR
Mod-Def 0 is grounded by the module to indicate that the module is present
Mod-Def 1 is the clock line of two wire serial interface for serial ID
Mod-Def 2 is the data line of two wire serial interface for serial ID
4. This is an optional input used to control the receiver bandwidth for compatibility with multiple data rates (most likely Fiber Channel 1x and 2x Rates). If implemented, the input will be internally pulled down with > 30kΩ resistor. The input states are:
Low (0 – 0.8V): Reduced Bandwidth
(>0.8, < 2.0V): Undefined
High (2.0 V – 3.465V): Full Bandwidth
Open: Reduced Bandwidth
5. LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor. Pull up voltage between 2.0V and VccT, R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
6. VeeR and VeeT may be internally connected within the SFP module.
7. RD-/+: These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 370 and 2000 mV differential (185 – 1000 mV single ended) when properly terminated.
8. VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP connector pin. Maximum supply current is 300 mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1Ω should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30 mA greater than the steady state value. VccR and VccT may be internally connected within the SFP transceiver module.
9. TD-/+: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 500 mV – 2400 mV (250 mV – 1200 mV single-ended), though it is recommended that values between 500 and 1200 mV differential (250 mV– 600 mV single-ended) be used for best EMI performance.

DIMENSIONS

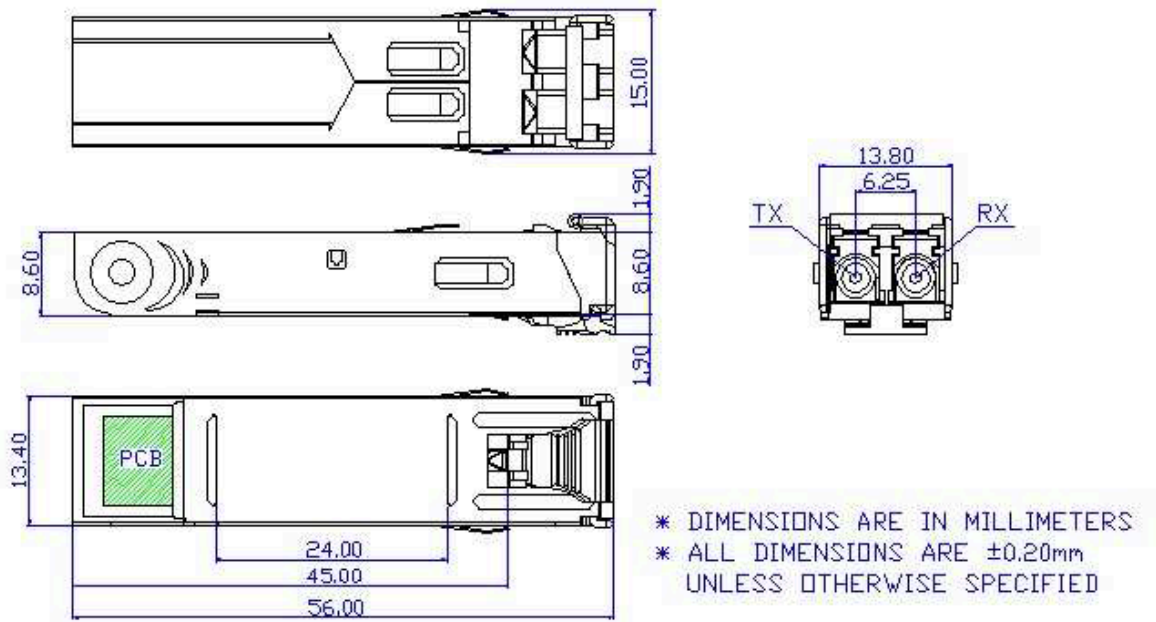

ORDERING INFORMATION

SFP Models	
Part Number	Description
SFP-S10-TAA	1 Gigabit SFP Transceiver, Single-Mode 10km / LC / 1310nm, 0~70°C, with TAA Compliant
SFP-S10-T-TAA	1 Gigabit SFP Transceiver, Single-Mode 10km / LC / 1310nm, -40~85°C, with TAA Compliant

© Antaira Technologies, LLC. All rights reserved. 202504
Specifications are subject to change without notice and without incurring any obligation.