

A425

2MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 4.3x Zoom Lens



- Face, People and Car Detection
- 2 Megapixel (Support 120fps@1080P)
- Day & Night with Extreme Low Light Sensitivity and Adaptive IR LED
- 4.3x Zoom Lens with f2.8-12/F1.8-F3.3, Auto focus (for installation)
- Extreme WDR
- Super wide angle
- Event trigger, response and notification

► Specifications

Device

| | |
|----------------------------------|--|
| Product Type | Zoom Bullet |
| Maximum Resolution | 2MP |
| Product Application | Face, People and Car Detection |
| Application Environment | Outdoor |
| Image Sensor | Progressive Scan CMOS |
| Sensor Size | 1/2.8 " |
| Effective Pixels | 1945(H) X 1097(V) (2.13 MP) |
| Day / Night | Yes |
| Low Light Sensitivity | Extreme |
| Minimum Illumination | Color: 0.002 lux (30 IRE); B/W: 0 lux (IR LED on) |
| Mechanical IR Cut Filter | Yes |
| IR LED | Adaptive IR LED |
| IR Working Distance | 50m |
| Electronic Shutter | 1/5-1/64000 second (manual mode); 1/5-1/64000 second (auto mode) |
| Horizontal Resolution (TV Lines) | 1000 TVL |

Lens

| | |
|--------------------------|---------------------|
| Focal Length | Zoom, f2.8-12mm |
| Aperture | F1.8-F3.3 |
| Zoom Ratio | 4.3x optical zoom |
| Zoom Application | Camera Installation |
| Iris | Adaptive iris |
| Focus | Auto focus |
| Lens Mount | Board mount |
| Horizontal Viewing Angle | 106.6° - 34.6° |
| Vertical Viewing Angle | 54.4° - 19.5° |

Video

| | |
|-----------------------------------|---|
| Compression | H.265, H.264 (Main profile), MJPEG |
| Maximum Frame Rate vs. Resolution | 120 fps at 1920 x 1080 (High Frame Mode) 60 fps at 1920 x 1080 (High Frame Mode) 30 fps at 1920 x 1080 30 fps at 1280 x 960 120 fps at 1280 x 720 (High Frame Mode) 60 fps at 1280 x 720 (High Frame Mode) 30 fps at 1280 x 720 30 fps at 800 x 600 30 fps at 720 x 480 30 fps at 640 x 480 |
| High Frame Mode | Support |
| Multi-Streaming | Simultaneous triple streams based on three configurations |
| Bit Rate Mode | Constant, Variable |
| Wide Dynamic Range | Extreme WDR (142 dB) |
| Image Enhancement | White Balance, Brightness, Contrast, Saturation, Sharpness, Backlight compensation (BLC), Strong Light Suppression, Digital Image Stabilizer (DIS, EIS) |
| Digital Noise Reduction | 2D + 3D DNR |
| Privacy Mask | 4 configurable regions |
| Text Overlay | Yes |
| On-Screen Graphics | Yes |
| Built-in Analytics | Deep Learning : Face Detection, People Detection, Car Detection, Tampering Detection, People Line Crossing Detection, People Enter Area Detection, People Exit Area Detection, People Loitering Detection |
| Image Orientation | Flip, Mirror, Rotation (Corridor mode) (90°, 180°, 270°) |

Audio

| | |
|-------------------|----------------------------------|
| Audio Type | 2-way, Mic-in, Line-in, Line-out |
| Audio Compression | 8 kHz, Mono, G.711 |

Network

| | |
|----------------------------|---|
| Network Protocol & Service | IPv4/v6, TCP, UDP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, NTP, RTP, RTSP, RTCP, SMTP, FTP, IGMP, ICMP, ARP, Bonjour, UPnP, QoS, SNMP, IEEE 802.1X |
| Ethernet Port | 1 x Ethernet (10/100 Base-T), RJ-45 pigtail connector |
| Security | IP address filtering, HTTPS encryption, Password protected user level, Anonymous login, IEEE 802.1X network access control |

Event

| | |
|----------------|---|
| Event Trigger | Video motion detection (3 regions), External device through digital input, Sound detection, Intelligent event detection, Video streams loss |
| Event Response | Notify control center, Change camera settings, Command other devices, E-mail notification with snapshots, Play the audio file, Push notification to mobile device, Save video to local storage, Upload video to NVR server, Upload video or snapshot to FTP server, Activate external device through digital output |

System

| | |
|----------|---------|
| Watchdog | Support |
|----------|---------|

Integration

| | |
|-----------------------|---|
| Unified Solution | Fully compatible with ACTi software |
| GPS Position | Manual setting |
| Edge Recording | Support (integration with NVR by ONVIF Profile G or proprietary protocol)* |
| ONVIF Compliant | Yes, Profile S, Profile G, Profile Q, Profile T, Profile M* (To be available through future firmware upgrade) |
| Web Browser | IE 11, Google Chrome, Microsoft Edge, Apple Safari |
| Auto Firmware Upgrade | Yes |

Interface

| | |
|----------------------|---|
| Audio Interface | Cable with 3.5mm Phone Jack |
| Local Storage | MicroSD, MicroSDHC, MicroSDXC Memory Card Slot (card not included, up to 256GB, Kingston or Sandisk only) |
| Digital Input/Output | 1/1 (Terminal block) |
| Operating Button | Reset Button |

General

| | |
|-----------------------|--|
| Power Source | DC 12V, PoE Class 3 (IEEE802.3af) |
| Weight | 1240g (2.73lb) |
| Dimensions | (W x H x D): 94mm x 86mm x 291.1mm (3.7" x 3.38" x 11.46") |
| Environmental Casing | Weatherproof (IP67), Vandal proof metal casing (IK10) |
| Bundled Accessories | Integrated bracket |
| Mount Type | Integrated Bracket, Wall Mount, Ceiling Bracket, Pole Mount |
| Operating Temperature | -30°C ~ 50°C (-22°F ~ 122°F) |
| Approvals | CE Class A, FCC Class A, IP67, IK10 (metal casing) |
| Color | White |
| Real-time Clock (RTC) | Yes |
| Warranty | 3 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty |


* Edge Recording function is integrated with NVR 3 Corporate / NVR 3 Business / INR / GNR series.

► Photo Indication



- 1 Audio Output
- 2 DC 12V Power Input
- 3 Reset Button
- 4 Audio Input
- 5 Ethernet Port
- 6 Digital Input / Output



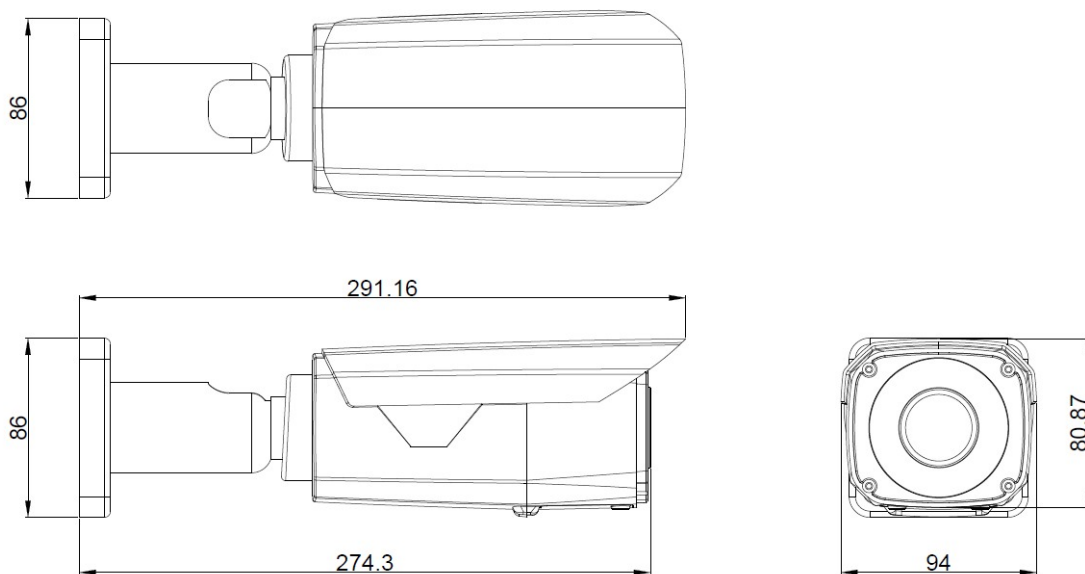


► Dimension Diagram



Unit: mm [inch]

▶ Related Products

Mounting Accessories - Camera Mount


| | | |
|-----------|---|--|
| PMAX-0512 |  | Pole Mount (for E39, PMAX-0706), supports 3.25" to 7.0" Poles |
| PMAX-0517 |  | Pole Mount (for A44, A45, A46, A48, A413), supports 3.25" to 7.0" Poles |
| PMAX-0518 |  | Pole Mount (for A44, A45, A46, A48, A413), supports 2" to 3" Poles |
| PMAX-0524 |  | Pole Mount (for A416, A418, A419, A44, A45, A46, A48, VMGB-351, B419-P2), supports 2.64" to 5" Poles |
| PMAX-0706 |  | Junction Box (for A3x, A4x, E39, E41x, PMAX-0805) |

Note: Some mounting accessories may need additional accessories for installation. Please check www.acti.com/mountingselector for more information.



Power Supply Accessories - Power Adapter

| | | |
|-----------|---|---|
| PPBX-0012 |  | Power Adapter AC 100~240V (US), for A3x, A4x, A88, A9x, Z31, Z8x, Z9x |
| PPBX-0013 |  | Power Adapter AC 100~240V (EU), for A3x, A4x, A88, A9x, Z31, Z8x, Z9x |
| PPBX-0014 |  | Power Adapter AC 100~240V (UK), for A3x, A4x, A88, A9x, Z31, Z8x, Z9x |

Power Supply Accessories - PoE Injector

| | | |
|-----------|---|---|
| PPOE-0002 |  | PoE Injector IEEE 802.3af compliant, AC 100~240V, with universal connectors |
|-----------|---|---|

Audio Devices - Microphone

| | | |
|-----------|---|---|
| PMIC-0100 |  | Active Microphone Omnidirectional for all Cameras with Line-in Audio |
| PMIC-0200 |  | Passive Microphone Omnidirectional for all Cameras with Mic-in Audio using 3.5mm Phone Jack |