RS-232 Modem Cable DB9F to DB25M, 1.8 m (6 ft)

Model 232CAM





KEY FEATURES

- + Converts 25-pin serial to 9-pin AT serial
- + Fully molded backshell with strain relief for added protection
- + 26 AWG stranded conductors for flexibility
- + 9-wire, all pins terminated

OVERVIEW

Make easy connections between your serial equipment with this reliable, quality built, D-subminiature serial modem cable.


Signal Pinouts				
DB9 Female	DB25 Male			
1	8			
2	3			
3	2			
4	20			
5	7			
6	6			
7	4			
8	5			
9	22			
G	G			

ORDERING INFORMATION

MODEL NO.	CONNECTOR	CONNECTOR	LENGTH	COLOR
232CAM	DB9 Female	DB25 Male	1.8m (6 ft)	Beige



MECHANICAL DRAWING

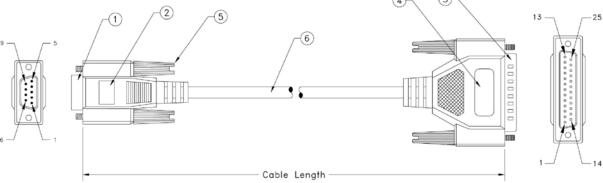

- (1)D-subminiature 9-pin female with gold plating contacts
- (2) Beige-color molded PVC hood, fully shielded with aluminum foil
- (3) D-subminiature 25-pin male with gold plating contacts
- (4) Beige-color molded PVC hood, fully shielded with aluminum foil
- (5) 4/40 molded thumbscrew, beige-color
- 28 AWG, 9 conductors + drain wire, single-shielded with aluminum foil, beige-color outer PVC jacket

All product specifications are subject to change without notice. 232CAM_Cable_1418ds

