


KN-v3-M02-3 cable

3 m pair cable with soldered (tinned) end of wires

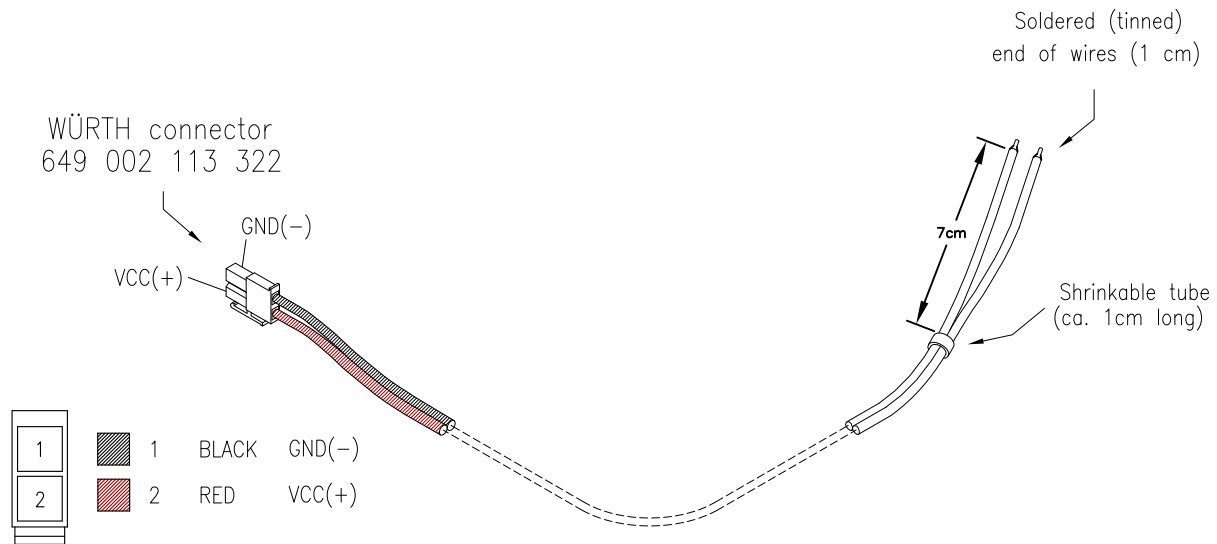


Connector pin-out, view into the router
(rear view of cable connector)


USED COMPONENTS:

- 2x 649 006 137 22 (4.20mm Female Terminal WR-MPC4)
- 1x 649 002 113 322 (4.20mm Female Dual Row Plug WR-MPC4)
- 1x VM03V2H-H 2x0,50 BK/RD cable length of 3m
- 1x Shrinkable tube (ca. 1cm long)

PACKAGE:

- The outer diameter must not exceed 95 mm.
- The cable is needed to tie using 1-2 wires.
- Connector is placed inside.
- The cable is wrapped in a plastic bag
of a maximum size 100x130 mm

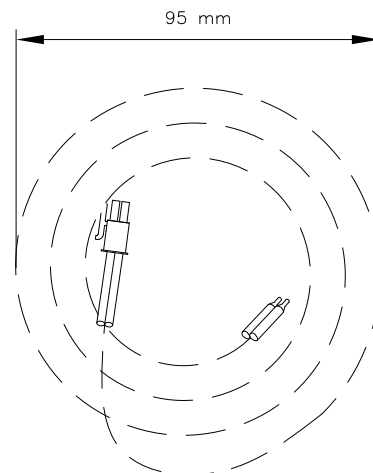

4											
3											
2											
1	Přidáno balení, odstraněna ver. 1m	P. Hanuš	1.8.2016		M. Požtýnský	1.8.2016		P. Kopecký	1.8.2016		
0	VÝCHOZÍ DOKUMENT	P. Hanuš	14.11.2014		E. Doskočil	14.11.2014		P. Kopecký	14.11.2014		
Rev.	Description of changes	Drawn	Date	Signature	Checked	Date	Signature	Approved	Date	Signature	
Length unit: mm		Assembly drawing:				 <p>Conel s.r.o., Sokolská 71 562 04 Ústí n. Orlicí III tel./fax: 465 521 020, 021 mobile-exchange: 603 872 287 E-mail: info@conel.cz http://www.conel.cz/</p>					
Accuracy:		Old drawing:									
Tolerance:		Commission:									
Scale:	Format: A4	File: VKA-2014-03-1.dwg									
Drawing name: KN-v3-M02 cable					Drawing number: VKA-2014-03-1			Sheet: 1		Issue No.:	