


# E56

## 3MP Indoor Dome with D/N, Adaptive IR, Superior WDR, Fixed Lens




- 3 Megapixel with 1080p
- Day & Night with Adaptive IR LED
- Wide Angle Fixed Lens with f2.93mm / F2.0
- Superior WDR (110 dB)
- 30 fps at 1920 x 1080

### PHOTO INDICATION

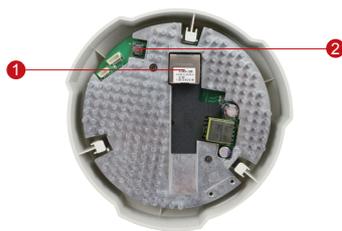

- 1 Ethernet Port
- 2 Reset Button

### DIMENSION DIAGRAM

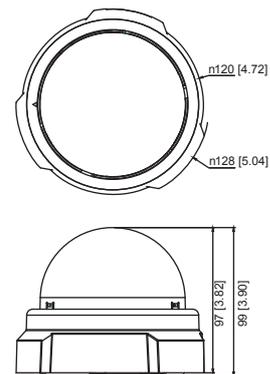

Unit: mm [inch]

### ACCESSORY OPTIONS

Power Supply		
PPOE-0001		IEEE 802.3af PoE Injector for Class 1, 2 or 3 devices, with universal adapter

Dome Cover		
PDCX-0104		3-inch, smoke, non-vandal proof

Popular Mounting Solutions	
Surface	Accessories not required
Wall	PMAX-0316 
Pendant	PMAX-0101 + PMAX-0103 
Corner	PMAX-0402 + PMAX-0303 + PMAX-0101 
Pole	PMAX-0503 + PMAX-0303 + PMAX-0101 
Flush	PMAX-1006 
Gang Box	PMAX-0805 

\* For more mounting solutions, please refer to Project Planner on [www.acti.com](http://www.acti.com)

**PRODUCT SPECIFICATION**

<b>E56</b>	
<b>• Device</b>	
Device Type	Indoor Dome
Image Sensor	Progressive Scan CMOS
Sensor Size	1/3"
Effective Pixels	2048(H) X 1536(V) (3.15 MP)
Horizontal Resolution	1250 TVL
Day / Night	Yes
Low Light Sensitivity	Standard
Minimum Illumination	Color: 0.1 lux at F2.0 (30 IRE, 2400°K); B/W: 0 lux (IR LED on)
Color to B/W Switch	ISP based switch, configurable
Mechanical IR Cut Filter	Yes
IR Sensitivity Range	700~1100nm
IR LED	Adaptive IR LED (IR Exposure Compensation) x 10 (850nm)
IR Working Distance	30 m (0 lux, 30 IRE, Gain 255, Auto shutter mode)
Electronic Shutter	1/5 ~ 1/2,000 sec (manual mode); 1/5 ~ 1/10,000 sec (auto mode)
S/N Ratio	52 dB
<b>• Lens</b>	
Focal Length / Aperture	Fixed focal, f2.93 mm / F2.0
Iris	Fixed iris
Focus	Fixed focus
Lens Mount	Board mount
Horizontal Viewing Angle	85.7°
Viewing Angle Adjustment	Pan: 0°~330°; Tilt: 20°~90°
<b>• Video</b>	
Compression	H.264 (Baseline/ Main/ High profile), MJPEG
Max. Frame Rate vs. Resolution	15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 800 x 600, 30 fps at 640 x 480; 15 fps at 320 x 240
Multi-Streaming	Simultaneous dual streams based on two configurations
Bit Rate	28 Kbps - 6 Mbps (per stream)
Bit Rate Mode	Constant, Variable
Image Enhancement	Superior WDR (110 dB); White balance: automatic, hold, and manual; Brightness; Contrast; Sharpness(auto); Auto gain control; Digital noise reduction; Flickerless
Privacy Mask	4 configurable regions
Text Overlay	User defined text on video
Image Orientation	Image flip and mirror
<b>• Network</b>	
Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv4, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
Ethernet Port	1, Ethernet (10/100 Base-T), RJ-45 connector
Security	IP address filtering; HTTPs encryption; Password protected user levels; Anonymous login; IEEE802.1X network access control
<b>• Alarm</b>	
Alarm Trigger	Video motion detection (3 regions)
Alarm Response	Notify control Center; Change camera settings; Command other devices; E-mail notification with snapshots; Upload video, snapshot to FTP server
<b>• General</b>	
Power Source / Consumption	PoE Class 2 (IEEE802.3af) / 5.28W (IR on)
Weight	375g (0.827lb)
Dimensions (Ø x H)	128 mm x 99 mm (5.04" x 3.90")
Mount Type	Surface, Pendant, Wall, Corner, Pole, Flush, Gang box
Starting Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Operating Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Operating Humidity	10% ~ 85% RH
Approvals	CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B), UL (for optional PoE injector)
<b>• Integration</b>	
Unified Solution	Fully compatible with ACTi software
ISV Integration	Software Development Kit (SDK) available; ONVIF compliant
Firmware Access Browser	Microsoft Internet Explorer 8.0 or newer (full functionality) Safari with QuickTime installed, and other browsers with VLC installed (partial functionality)
Auto Firmware Upgrade	Yes
GPS Position	Manual Setting

\* All specifications are subject to change without notice.

\* All brand names and registered trademarks are the property of their respective owners.

www.acti.com

