


ENR-010P

4-Channel Mini Standalone NVR with 4-port PoE Connectors



- 1-bay Mini Standalone NVR
- Maximum Number of Video Devices: 4
- Free License: 4
- Built-in PoE Connectors (4 ports)
- Video export formats: AVI, RAW
- Event trigger, response and notification
- Workstation, Web Client, Mobile Client

► Solution Diagram

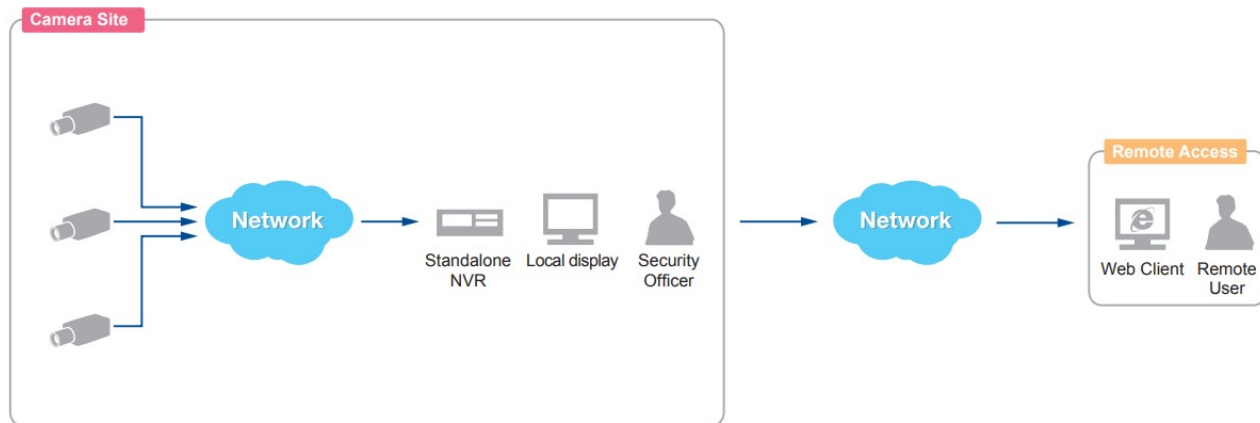

Remote User: Administrator / Supervisor / Manager / Security Officer

► Specifications

Device

Product Type	Standalone NVR
Maximum Resolution	Local: up to 4MP; Remote: up to 12MP
Maximum Number of Cameras	4
Maximum Number of Video Devices	4

Maximum Number of Clients	Local: 1, Remote: 2
---------------------------	---------------------

License

License required	No
Free License	4

Live View

Display Layout Mode	1, 2, 4
Fisheye Dewarping	Yes
Local Live View performance	Please check "Standalone NVR Performance Validator" (http://www.acti.com/SANVRPerformance)
Digital Zoom	Yes
Event Status	Display event status upon alarm or upon connection loss or recovery between server and client
Instant Playback	Instant Playback in live view window (Remote client)

PTZ

PTZ Control	PTZ Control, Speed Control, 32 preset points
Joystick	USB based joystick supported

Video

Compression	H.264
-------------	-------

Audio

Audio Compression	PCM, G.711
-------------------	------------

Network

Network Protocol & Service	IPv4/v6, TCP, IP, UDP, HTTP, HTTPS, DHCP (Server/Client), PPPoE, RTP, RTSP, DNS, DDNS, NTP, SNTP, ICMP, ARP, SMTP, UPnP, To be available through future firmware upgrade
Ethernet Port	Total ports: 5 port(s) (WAN) Non-PoE: 1 port(s), Ethernet (10/100 Base-T), RJ-45 connector (LAN) PoE: 4 port(s), Ethernet (10/100 Base-T), RJ-45 connector
Security	HTTPS encryption, Password protected user level

Recording

Scheduled Recording	Yes
Event Recording	Yes
Manual Recording	Yes
Event Speed-up Recording	Yes
Dual Stream Management	Yes
Maximum Recording Throughput	16 Mbps

Search & Playback

Playback Control	Continuous forward and backward playback with speeds 0.5x/1x/2x/4x/8x/16x/32x, pause, stop
Synchronized Playback	4 channels
Video Export	AVI, RAW

Event

Event Trigger	Video motion detection, External device through digital input, Network loss and recovery
Event Response	Play alert sound, Activate external device through digital output, E-mail notification with snapshots, Go to PTZ preset point or preset tour

System

Permission control	Unlimited number of users, Customizable permissions for user groups
Client PC Operating System	Windows 7 SP1, Windows 8.1
Server Operating System	Embedded Linux
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, Event/time based search and playback, Supported device(s) iPhone, Android device
USB	2-Port USB 2.0
Language	Multi-Language
System Status Monitor	Real time status reports on remote browser

Integration

Unified Solution	Fully compatible with ACTi cameras, encoders, central management system, TV wall and intelligent video surveillance software
ONVIF Compliant	Yes, Profile S
Web Browser	IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)

Storage

Storage Bay	SATA, Max. 1 Disk(s) (Options to have empty bays, one 1TB or one 2TB storage disk included)
HDD Size	3.5"
Maximum Recording Capacity	14TB x1


Interface

Local Access	USB keyboard & mouse
Local Display Interface	HDMI x 1,

General


PoE Output	Maximum 15.4 Watts per port
PoE Power Budget	Maximum 80 W
Power Source	DC 48V
Weight	2186g (4.82lb)
Dimensions	(W x H x D): 260mm x 45mm x 228mm (10.2" x 1.8" x 9")
Bundled Accessories	Power Adapter
Fan	Yes
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% - 85% RH
Remote Access	Workstation, Web Client, Mobile Client
Approvals	CE, FCC, UL (for built-in power adapter)
Warranty	3 Year(s)

► Photo Indication

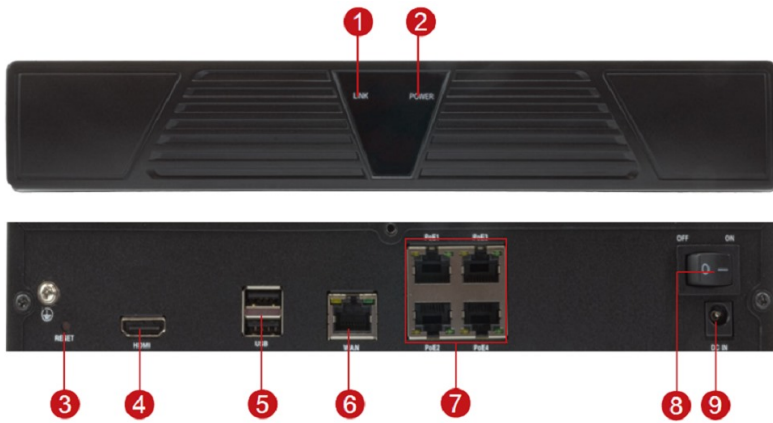

- 1 Link Indicator
- 2 Power Indicator
- 3 Reset Button
- 4 HDMI Connector
- 5 USB Port
- 6 Gigabit Network Connector
- 7 4 PoE 10/100Mbps Ports
- 8 Power Switch
- 9 DC 48V Power Input

► Dimension Diagram

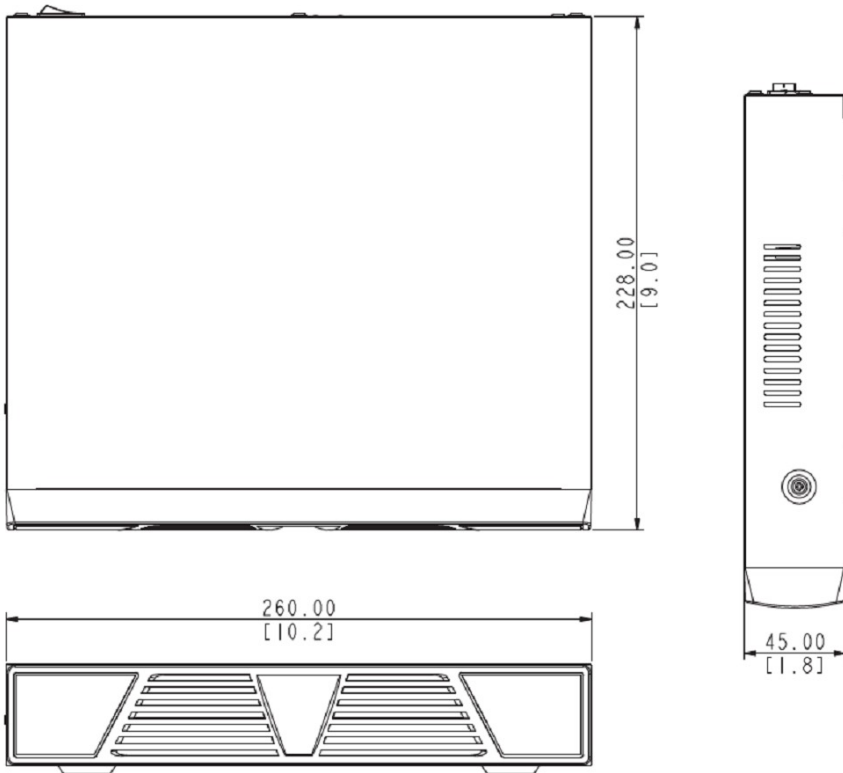


Unit: mm [inch]


▶ Related Products


Power Supply Accessories - Power Adapter


R707-X0004  Power Adapter AC 100~240V (for ENR-010P)


Network & Storage Peripherals - Hard Disk


PHDD-2200  WD WD1005FBYZ 1TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for ENR-0x0P, ENR-110, ENR-120, ENR-130, ENR-22x, ENR-22xP, GNR-310, GNR-320, INR-100, INR-340, INR-430, INR-440, INR-450, INR-460)

PHDD-2301  HGST ULTRASTAR 7K6000 2TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR- 0x0P, ENR-22x, ENR-22xP)


PHDD-2501  HGST ULTRASTAR 7K6000 4TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)

PHDD-2702  HGST ULTRASTAR 7K6000 6TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)


PHDD-2900  WD WD8002FRYZ 8 TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for GNR-310, GNR-320, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460)

PHDD-2A00  WD WD101KRYZ 10TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache (for ENR-xxx, ENR-xxxP, GNR-330, GNR-410, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460, INR-470)

PHDD-2B01  HGST ULTRASTAR 7K6000 12TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache

PHDD-2E01  HGST ULTRASTAR 7K6000 14TB 3.5" Hard Disk Drive, 7200 RPM 512MB Cache

Controllers - Joystick

PJSK-0100  Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)