


# ENR-1000

## 4-Channel Desktop Standalone NVR



- 2-bay Desktop Standalone NVR
- Maximum Number of Video Devices: 4
- Free License: 4
- Video export formats: AVI, RAW
- Event trigger, response and notification
- Web Client, Mobile Client

### ► Solution Diagram

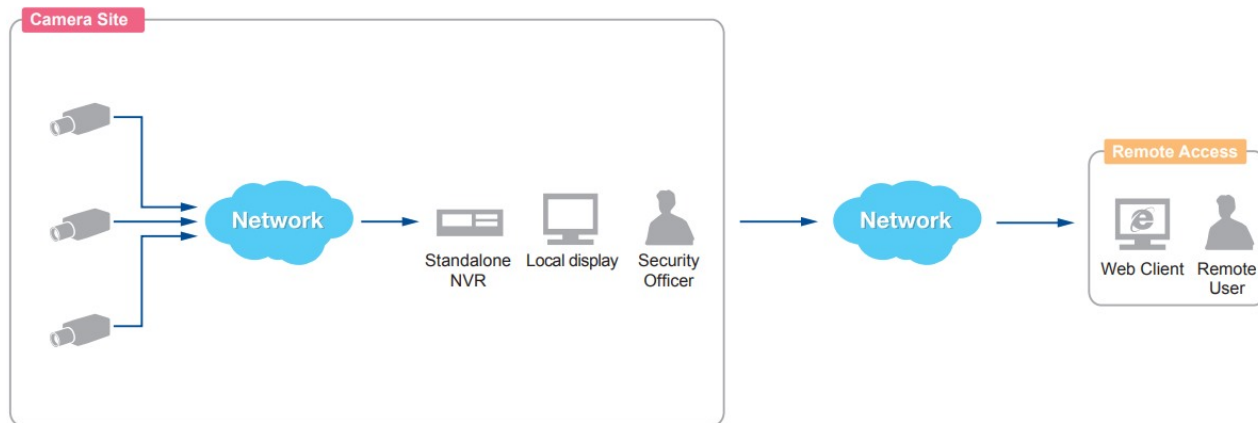

Remote User: Administrator / Supervisor / Manager / Security Officer

### ► Specifications

#### Device

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Product Type                    | Standalone NVR                       |
| Maximum Resolution              | Local: up to 2MP; Remote: up to 10MP |
| Maximum Number of Cameras       | 4                                    |
| Maximum Number of Video Devices | 4                                    |

|                           |                     |
|---------------------------|---------------------|
| Maximum Number of Clients | Local: 1, Remote: 2 |
|---------------------------|---------------------|

**License**

|                  |    |
|------------------|----|
| License required | No |
| Free License     | 4  |

**Live View**

|                             |   |
|-----------------------------|---|
| Display Layout Mode         | Local:1, 2, 4, Remote:1, 2, 4   |
| Fisheye Dewarping           | No  |
| Local Live View performance | Please check "Standalone NVR Performance Validator" ( <a href="http://www.acti.com/SANVRPerformance">http://www.acti.com/SANVRPerformance</a> ) |
| Digital Zoom                | Yes   |
| Event Status                | Display event status upon alarm or upon connection loss or recovery between server and client   |
| Instant Playback            | Instant Playback in live view window (Remote client)  |

**PTZ**

|             |  |
|-------------|--|
| PTZ Control | PTZ Control, Speed Control, 32 preset points |
| Joystick    | USB based joystick supported                 |

**Video**

|             |       |
|-------------|-------|
| Compression | H.264 |
|-------------|-------|

**Audio**

|                   |            |
|-------------------|------------|
| Audio Compression | PCM, G.711 |
|-------------------|------------|

**Network**

|               |  |
|---------------|--|
| Ethernet Port | Total ports: 2 port(s) Non-PoE: 2 port(s), Ethernet (1000 Base-T), RJ-45 connector |
|---------------|--|

**Recording**

|                              |                                   |
|------------------------------|-----------------------------------|
| Scheduled Recording          | Yes                               |
| Event Recording              | Yes                               |
| Manual Recording             | Yes                               |
| Event Speed-up Recording     | Yes                               |
| Maximum Recording Throughput | 16 Mbps 4 channels at 1080p/30fps |

**Search & Playback**

|                       |  |
|-----------------------|--|
| Playback Control      | Continuous forward and backward playback with speeds 0.5x/1x/2x/4x/8x/16x/32x, pause, stop |
| Synchronized Playback | 4 channels   |
| Video Export          | AVI, RAW   |

**Event**

|                |  |
|----------------|--|
| Event Trigger  | Video motion detection, External device through digital input, Network loss and recovery   |
| Event Response | Go to PTZ preset point or preset tour, Play alert sound, E-mail notification with snapshots, Activate external device through digital output |

**System**

|                            |  |
|----------------------------|--|
| Permission control         | Unlimited number of users, Customizable permissions for user groups  |
| Client PC Operating System | Windows 7 SP1, Windows 8.1   |
| Server Operating System    | Embedded Linux   |
| Mobile Client Program      | Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, Event/time based search and playback, iPad, Android device |
| USB                        | 2-Port USB 2.0   |
| Language                   | Multi-Language   |
| System Status Monitor      | Real time status reports on remote browser   |

**Integration**

|                  |  |
|------------------|--|
| Unified Solution | Fully compatible with ACTi cameras, encoders, central management system, TV wall and intelligent video surveillance software |
| ONVIF Compliant  | Yes, Profile S   |
| Web Browser      | IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.) |

**Storage**

|             |                      |
|-------------|----------------------|
| Storage Bay | SATA, Max. 2 Disk(s) |
|-------------|----------------------|


**Interface**

|              |  |
|--------------|--|
| Local Access | HDMI monitor, USB keyboard & mouse, USB Joystick |
|--------------|--|


**General**

|                       |   |
|-----------------------|---|
| Power Source          | DC 12V  |
| Weight                | 1330g (2.93lb)  |
| Dimensions            | (W x H x D): 135mm x 121mm x 241mm (5.3" x 4.8" x 9.5") |
| Bundled Accessories   | Power Adapter   |
| Fan                   | Yes   |
| Operating Temperature | 0°C ~ 40°C (32°F ~ 104°F)                               |
| Operating Humidity    | 10% - 85% RH  |
| Remote Access         | Web Client, Mobile Client                               |
| Approvals             | CE, FCC, UL (for bundled power adapter)                 |
| Warranty              | 3 Year(s)   |

## ► Photo Indication

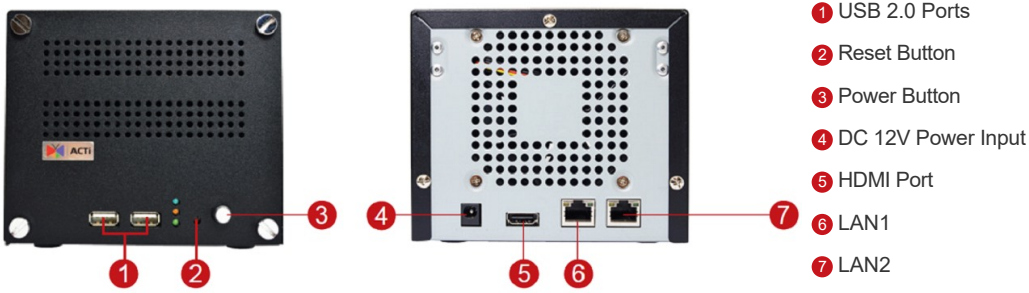

## ► Dimension Diagram

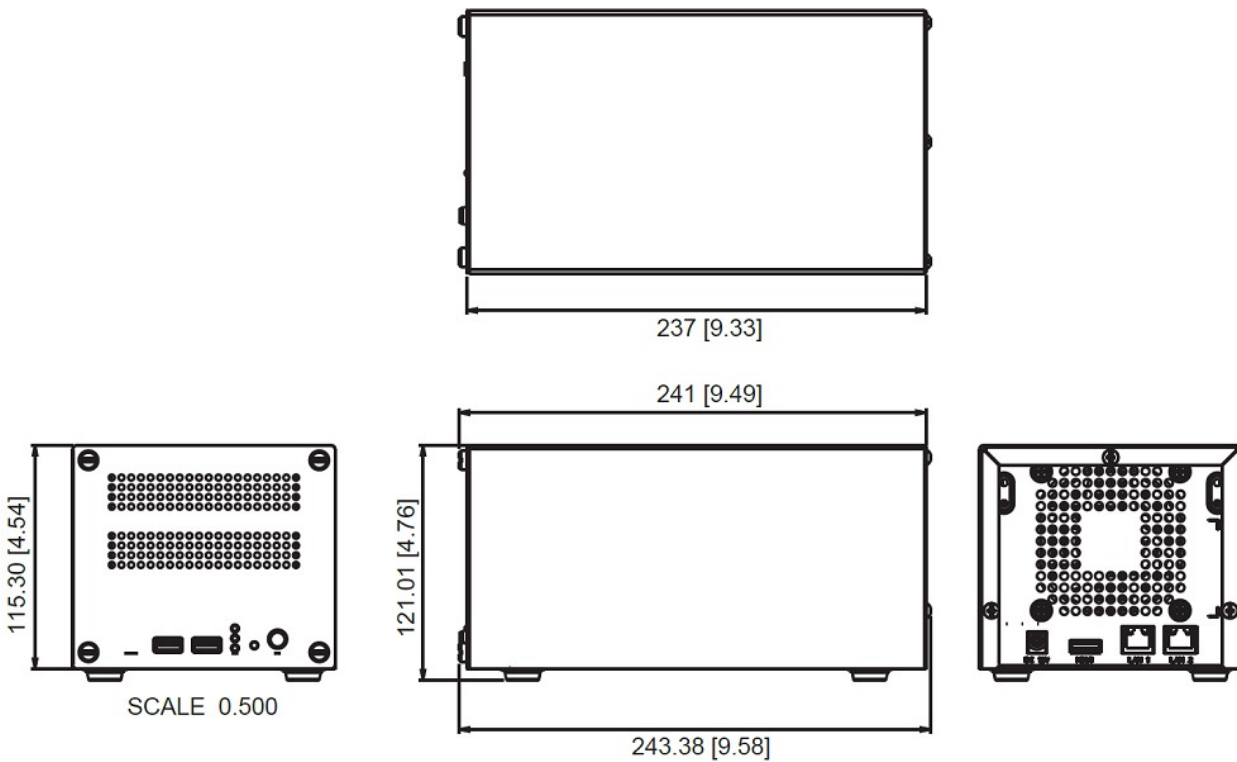

Unit: mm [inch]

## ▶ Related Products

### Controllers - Joystick

PJSK-0100



Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)