



Model:I-8114



Model:I-8114(G)

I-8114/ I-8114(G)

4-port RS-232 Module



Specifications & Features



- **Parallel I/O Module**
- RS-232 Port: 4
- Connector: 10-pin RJ-45
- 16550 compatible
- Internal 16 bytes FIFO
- Transmission speed: 115.2 K bps max.
- Modem control
- TXD, RXD, RTS, CTS, DSR, DTR, DCD, RI, GND
- Shared Interrupt
- Support interrupt driven software library
- Support VxCOM library
- Power Consumption: 3.6W
- Include cable : CA-RJ0903 x 1

Ordering information

I-8114	4-port RS-232 Module
I-8114 CR	4-port RS-232 Module (RoHS)
Includes	CA-RJ0903 x 1

I-8114 Hardware

PIN Assignment

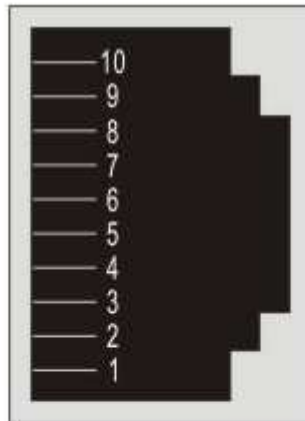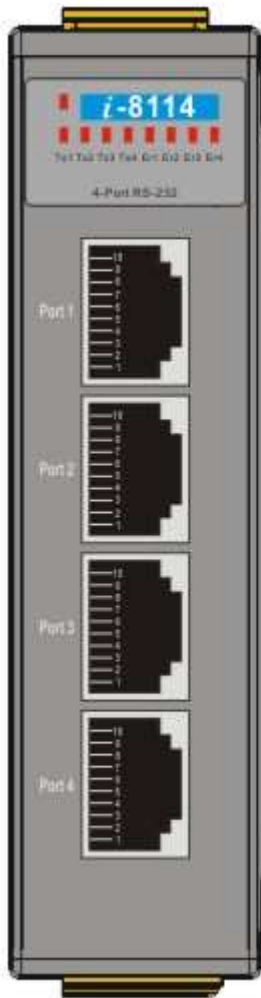

10-pin RJ-45

Pin		Signal	Mode
01	DCD	Data Carrier Detect	Input
02	DSR	Data Set Ready	Input
03	RTS	Request To Send	Output
04	GND	Ground	
05	TD	Transmit Data	Output
06	RD	Receive Data	Input
07	GND	Ground	
08	CTS	Clear To Send	Input
09	DTR	Data Term Ready	Output
10	RI	Ring Indicator	Input