


PCI-1604L PCI-1602UP

2-Port RS-232 PCI Communication Card
2-Port RS-232/422/485 Low-Profile
Universal PCI Communication Card with
Isolation Protection

NEW

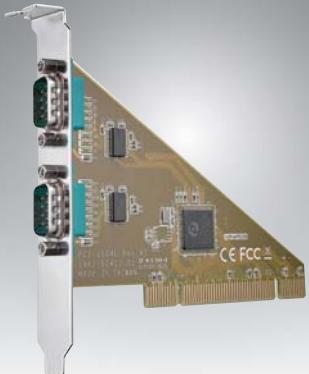

PCI-1604L

FCC CE



PCI-1602UP

Features

- PCI bus 2.2 compliant
- Up to 921.6 kbps speed for extremely fast data transmissions
- Level 1 ESD protection (air 15 KV , contact 8 KV)
- 2 x RS-232 ports
- 128-byte FIFO
- Supports Windows XP/7/8/10 and Linux operating systems
- -20 ~ 60 °C operating temperature

Specifications

General

▪ Bus Type	Universal PCI v2.2
▪ Certification	CE, FCC class A
▪ Connectors	2 x DB9, male
▪ Dimensions (L x H)	119.91 x 83.06 mm (4.72" x 3.27")
▪ Power Consumption	200mA @ +3.3V (typ.)

Communications

▪ Comm. Controller	PI7C8952
▪ Data Bits	5, 6, 7, 8
▪ Data Signals	RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI
▪ FIFO	128 bytes
▪ Flow Control	DTR/DSR, RTS/CTS, Xon/Xoff
▪ Parity	None, Odd, Even, Mark, or Space
▪ Speed	50 bps ~ 921.6 kbps
▪ Stop Bits	1, 1.5, 2

Protection

▪ ESD Protection	15 KV (air), 8 KV (contact)
▪ EFT Protection	1 KV

Software

▪ Bundled Software	ICOM tools
▪ OS Support	Windows XP/7/8/10, and Linux

Environment

▪ Operating Humidity	5 ~ 95% RH, non-condensing
▪ Operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
▪ Storage Temperature	-25 ~ 85 °C (-13 ~ 185 °F)

Ordering Information

▪ PCI-1604L-AE

2-port RS-232 PCI comm. card

Features

- PCI bus 2.2 compliant
- Up to 921.6 kbps speed for extremely fast data transmissions
- 2 x RS-232/422/485 ports
- Supports Windows XP/7/8/10 and Linux operating systems
- 3,000 V_{DC} isolation protection
- Automatic RS-485 data flow control
- Powerful and easy-to-use utility (ICOM tools)
- Supports any baud rate setting

Specifications

General

▪ Bus Type	Universal PCI V 2.2
▪ Certification	CE, FCC class A
▪ Connectors	1 x DB25, female
▪ Dimensions (L x H)	119.91 x 64.41 mm (4.72" x 2.5") (low-profile MD1)
▪ Power Consumption	260mA@+3.3V (typ.)

Communications

▪ Communication Controller	PI7C8952
▪ Data Bits	5, 6, 7, 8
▪ Data Signals	RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI RS-422: Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-
▪ FIFO	128 bytes
▪ Flow Control	CTS/RTS, Xon/Xoff
▪ Parity	None, Even, Odd, Mark and Space
▪ Speed	50 bps ~ 921.6 kbps
▪ Stop Bits	1, 1.5, 2

Protection

▪ EFT Protection	1 KV
▪ Isolation Protection	3,000 V _{DC}
▪ ESD Protection	15KV (air), 8KV (contact)
▪ Surge Protection	1 KV

Software

▪ Bundled Software	ICOM tools
▪ OS Support	Windows XP/7/8/10 and Linux (check the software release note for versions supported)

Environment

▪ Operating Humidity	5 ~ 95% RH, non-condensing
▪ Operating Temperature	-10 ~ 60 °C (14 ~ 140 °F)
▪ Storage Temperature	-25 ~ 85 °C (-13 ~ 185 °F)

Ordering Information

▪ PCI-1602UP-CE

2-port RS-232/422/485 low-profile universal PCI comm card w/ isolation protection

Note: Both PCI-1602UP are equipped with a DB25 to 2 x DB9 cable.