

PCI-1602

PCI-1604

PCI-1610


PCI-1612

2-port RS-232/422/485 PCI Communication Card

2-port RS-232 PCI Communication Card

4-port RS-232 PCI Communication Card

4-port RS-232/422/485 PCI Communication Card

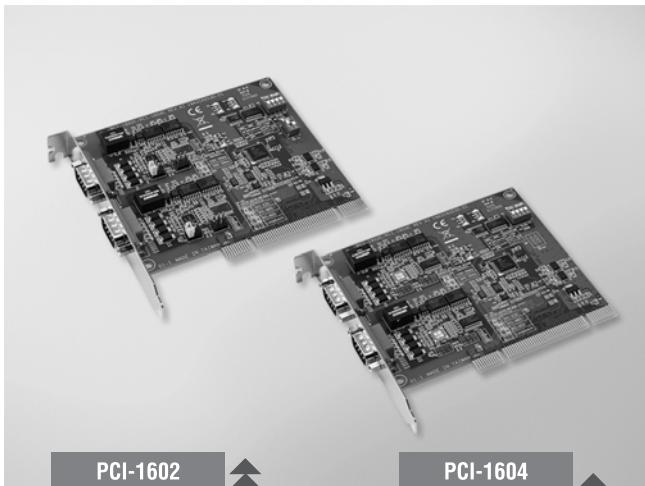

PCI-1602

PCI-1604



CE FCC

Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS-232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

Specifications

General

▪ Bus Type	Universal PCI v2.2
▪ Certification	CE, FCC class A
▪ Connectors	2x male DB9
▪ Dimensions (L x W)	119.91 x 106.67 mm (4.72" x 4.2")
▪ Power Consumption	260 mA @ +3.3 V (typ.)

Communications

▪ Comm. Controller	XR17V352
▪ Data Bits	5, 6, 7, 8
▪ FIFO	256 bytes
▪ Parity	None, Odd, Even, Mark and Space
▪ Speed	50 bps - 921.6 kbps
▪ Stop Bits	1, 1.5, 2

Software

▪ Bundled Software	ICOM Tools
▪ OS Support	Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

Environment


▪ Operating Humidity	5 ~ 95 % RH, non-condensing
▪ Operating Temperature	-10 ~ 60°C (14 ~ 140°F)
▪ Storage Temperature	-25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1602B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1602C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{dc}
PCI-1604C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{dc}

Ordering Information

- PCI-1602B-CE
 - PCI-1602C-CE
 - PCI-1604C-AE
- 2-port RS-232/422/485 PCI Comm. Card w/Surge
2-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation
2-port RS-232 PCI Comm. Card w/Surge & Isolation

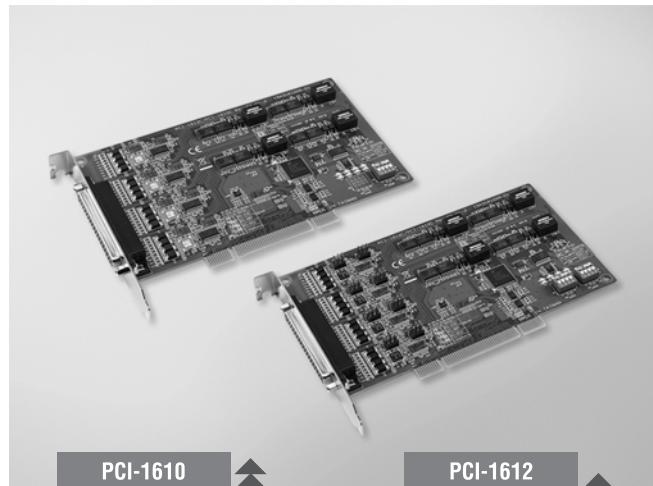

PCI-1610

PCI-1612



CE FCC

Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS-232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

Specifications

General

▪ Bus Type	Universal PCI v2.2
▪ Certification	CE, FCC class A
▪ Connectors	1x Female DB37
▪ Dimensions (L x W)	174.65 x 106.67 mm (6.88" x 4.2")
▪ Power Consumption	260 mA @ +3.3 V (typ.)

Communications

▪ Comm. Controller	XR17V354
▪ Data Bits	5, 6, 7, 8
▪ FIFO	256 bytes
▪ Parity	None, Odd, Even, Mark and Space
▪ Speed	50 bps - 921.6 kbps
▪ Stop Bits	1, 1.5, 2

Software

▪ Bundled Software	ICOM Tools
▪ OS Support	Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

Environment

▪ Operating Humidity	5 ~ 95 % RH, non-condensing
▪ Operating Temperature	-10 ~ 60°C (14 ~ 140°F)
▪ Storage Temperature	-25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1610B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1610C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{dc}
PCI-1612B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1612C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{dc}

Ordering Information

- PCI-1610B-DE
 - PCI-1610C-CE
 - PCI-1612B-DE
 - PCI-1612C-CE
- 4-port RS-232 PCI Comm. Card w/Surge
4-port RS-232 PCI Comm. Card w/ Surge & Isolation Protection
4-port RS-232/422/485 PCI Comm. Card w/Surge
4-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

Accessories

- OPT4A-AE

DB37 x1 to DB9 x4 Cable, 30cm