


# PCI-1713U PCI-1715U

100 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card

500 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card

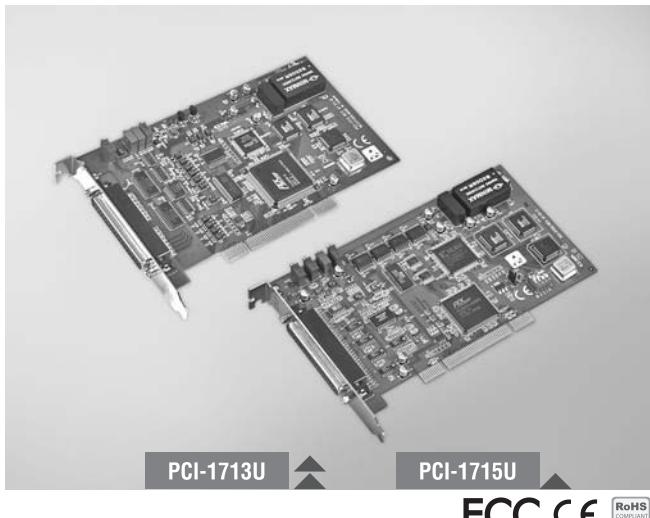

PCI-1713U

PCI-1715U

FCC CE



## Specifications

### Analog Input

- **Channels** 32 single-ended/16 differential (software programmable)
- **Resolution** 12 bits
- **Max. Sampling Rate** PCI-1713U: 100 kS/s  
PCI-1715U: 500 kS/s
- **FIFO Size** PCI-1713U: 4,096 samples  
PCI-1715U: 1,024 samples
- **Oversampling Protection** 30 V<sub>p-p</sub>
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Input Impedance** 1 GΩ
- **Sampling Modes** Software, onboard programmable pacer and external clock (TTL level)
- **Input Range (V, software programmable) & Absolute Accuracy**

Unipolar	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Bipolar	±10	±5	±2.5	±1.25	±0.625
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

\* ±1 LSB is added as the derivative for absolute accuracy

### General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

## Features

- 2,500 V<sub>DC</sub> isolation protection
- 32-ch single-ended or 16-ch differential or a combination of analog input
- 12-bit resolution for A/D conversion
- Programmable gain for each input channel
- Onboard FIFO memory (PCI-1713U: 4,096 samples; PCI-1715U: 1,024 samples)
- Software, internal or external pacer sampling modes supported
- Universal PCI bus
- BoardID™ switch

## Ordering Information

- **PCI-1713U** 100 kS/s, 12-bit, 32-ch Isolated AI PCI Card
- **PCI-1715U** 500 kS/s, 12-bit, 32-ch Isolated AI PCI Card

### Accessories

- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m

## Pin Assignments

