


PCI-1714U

PCI-1714UL

30 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card

10 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card

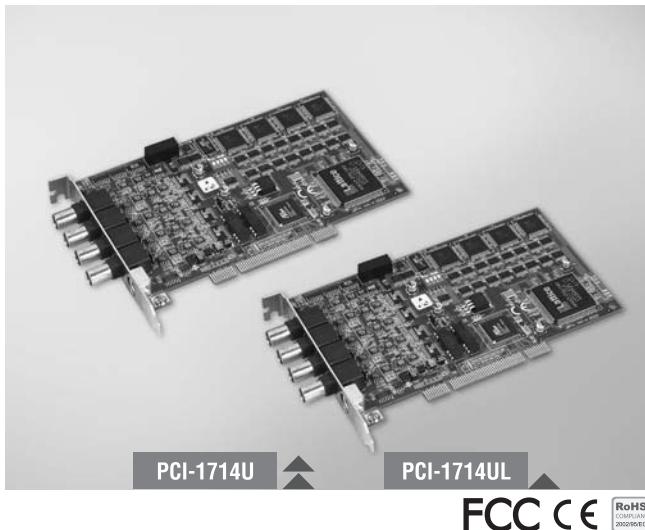

PCI-1714U

PCI-1714UL

FCC CE

Features

- 4 single-ended analog input channels
- 12-bit A/D converter, with up to 30 MHz sampling rate
- Programmable gain
- Onboard FIFO memory (PCI-1714U: 32,768 samples each channel; PCI-1714UL: 8,192 samples, each channel)
- 4 A/D converters simultaneously sampling
- Multiple A/D triggering modes
- Programmable pacer/counter
- BoardID™ switch
- Universal PCI Bus (supports 3.3 V or 5 V PCI bus signals)

Introduction

PCI-1714U and PCI-1714UL are advanced high-performance data acquisition cards based on the PCI bus. With a large FIFO of 32,768 for each channel, the maximum sampling rate of PCI-1714U can get up to 30 MS/s, on each channel, with an emphasis on continuous, non-stop, high-speed, streaming data of samples to host memory. The low-cost PCI-1714UL offers 10 MS/s on each channel at a stable rate, and has also been equipped with a universal PCI interface.

Specifications

Analog Input

▪ Channels	4 single-ended
▪ Resolution	12 bits
▪ Max. Sampling Rate	PCI-1714U: 30 MS/s per channel PCI-1714UL: 10 MS/s per channel
▪ FIFO Size	PCI-1714U: 32,768 samples each channel PCI-1714UL: 8,192 samples each channel
▪ Oversampling Protection	30 Vp-p
▪ Input Impedance	50 Ω/1 MΩ/Hi Z jumper selectable/100 pF
▪ Sampling Modes	Software polling, pacer
▪ Trigger Modes	Post-trigger, pre-trigger, delay-trigger, about-trigger
▪ Input Range (V, software programmable) & Absolute Accuracy	

Bipolar	±5	±2.5	±1	±0.5
Absolute Accuracy (% of FSR)*	0.1	0.2	0.2	0.4

* ±1 LSB is added as the derivative for absolute accuracy

General

▪ Bus Type	Universal PCI V2.2
▪ I/O Connectors	4 x BNC connector (for AI) 1 x PS/2 connector (for Ext. clock and trigger)
▪ Dimensions (L x H)	175 x 100 mm (6.9" x 3.9")
▪ Power Consumption	Typical: 5 V @ 850 mA ; 12 V @ 600 mA Max.: 5 V @ 1 A; 12 V @ 700mA
▪ Operating Temperature	0 ~ 60°C (32 ~ 140°F)
▪ Storage Temperature	-20 ~ 85°C (-4 ~ 185°F)
▪ Storage Humidity	5 ~ 95% RH, non-condensing


Ordering Information

- **PCI-1714U** 30 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card
- **PCI-1714UL** 10 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card


Accessories

- **ADAM-3909** DB9 DIN-rail Wiring Board
- **PCL-1010B-1E** BNC to BNC Wiring Cable, 1 m
- **PCL-10901-1E** DB9 to PS/2 Cable, 1 m
- **PCL-10901-3E** DB9 to PS/2 Cable, 3 m

Pin Assignments

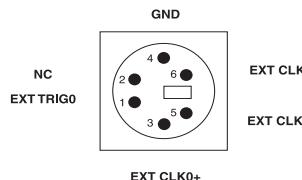

Onboard PS/2 Connector



PS/2 To DB9 Cable Connector