


# PCI-1762

16-ch Relay and 16-ch Isolated Digital Input PCI Card

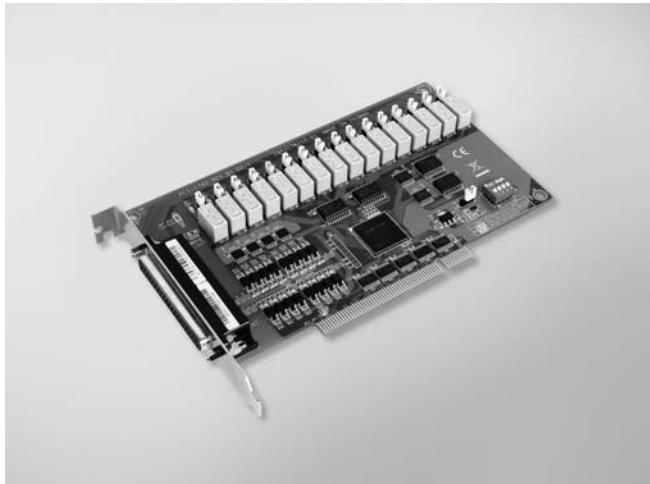

FCC CE

## Features

- 16 opto-isolated digital input channels
- 16 relay actuator output channels
- LED indicators to show activated relays
- Jumper selectable dry contact/wet contact input signals
- BoardID switch

## Introduction

The PCI-1762 provides 16 opto-isolated digital inputs with isolation protection of 2,500 V<sub>DC</sub> for collecting digital inputs in noisy environments, 16 relay actuators that can be used as a on/off control devices or small power switches.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

## Specifications

### Isolated Digital Input

▪ <b>Channels</b>	16
▪ <b>Input Voltage</b>	Logic 0: 3.0 V max. Logic 1: 10 V min. (50 V max.)
▪ <b>Interrupt Capable Ch.</b>	2 (IDIO,IDI8)
▪ <b>Isolation Protection</b>	2,500 V <sub>DC</sub>
▪ <b>Opto-Isolator Response</b>	100 µs
▪ <b>Input Resistance</b>	5.7 k Ohm 1 W

### Relay Output

▪ <b>Channels</b>	16
▪ <b>Relay Type</b>	Form A or Form B (Jumper selectable)
▪ <b>Contact Rating</b>	0.5 A @ 250 V <sub>AC</sub> , 0.5 A @ 30 V <sub>DC</sub>
▪ <b>Max. Switching Power</b>	125 VA, 15 W
▪ <b>Max. Switching Voltage</b>	250 V <sub>AC</sub> , 220 V <sub>DC</sub>
▪ <b>Operate Time</b>	Typical: 3 ms, Max.: 5 ms
▪ <b>Release Time</b>	Typical: 2 ms, Max.: 4 ms
▪ <b>Resistance</b>	Contact: 50 m Ohm max.
▪ <b>Life Expectancy</b>	2 x 10 <sup>5</sup> cycles min. @ 0.5A/ 250V <sub>AC</sub>

### General

▪ <b>I/O Connectors</b>	1 x DB62 female connector
▪ <b>Dimensions (L x H)</b>	175 x 100 mm (6.9" x 3.9")
▪ <b>Power Consumption</b>	Typical: 5 V @ 250 mA Max.: 5 V @ 620 mA
▪ <b>Operating Temperature</b>	0 ~ 60°C (32 ~ 140°F)
▪ <b>Storage Temperature</b>	-20 ~ 70°C (-4 ~ 158°F)
▪ <b>Storage Humidity</b>	5 ~ 95 % RH, non-condensing

## Ordering Information

▪ <b>PCI-1762</b>	16-ch Relay and 16-ch Isolated Digital Input PCI Card
<b>Accessories</b>	
▪ <b>PCL-10162-1E</b>	DB62 Cable, 1 m
▪ <b>PCL-10162-3E</b>	DB62 Cable, 3 m
▪ <b>ADAM-3962</b>	DB62 DIN-rail Wiring Board