


PCI-6202

4-CH 16-Bit 1 MS/s Analog Output & 32-CH Isolation DIO Card

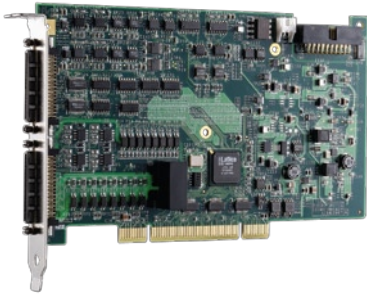

Introduction

The ADLINK PCI-6202 is a 4-CH, 16-bit high resolution voltage output card with hardware timed waveform generation. Four analog output channels can update simultaneously and support up to 1 MS/s update rate per channel. The PCI-6202 features excellent linearity (DNL < 1 LSB), which is suitable for dynamic signal simulation and control applications requiring high accuracy through voltage output. Furthermore, the PCI-6202 provides additional I/O control lines for system integration, such as 16-CH isolated digital input and 16-CH isolated output, 8-CH TTL DI and 8-CH TTL DO, 3-CH encoder inputs, and 4-CH PWM outputs. Combined, these I/O functionalities, solid voltage output linearity, and high accuracy, make the PCI-6202 the best single-board solution for both equipment manufacturers and laboratory research applications.

Features

- Supports a 32-bit 3.3 V or 5 V PCI bus
- Hardware-based waveform generation
- DNL Linearity less than 1 LSB
- Digital triggering for waveform generation
- 16-CH isolation digital inputs & 16-CH isolation digital outputs
- 8-CH TTL DI and 8-CH TTL DO
- 2-CH timer/counter, base clock: 40 MHz
- 4-CH PWM output
- 3-CH encoder inputs, supporting AB phase and CW/CCW
- Multiple card synchronization through SSI (System Synchronization Interface) bus
- Operating Systems
 - Windows 7/Vista/2000/XP/Server 2003
 - Linux
- Recommended Software
 - AD-Logger
 - VB.NET/VC.NET/VB/VC++/BCB/Delphi
 - DAQBench
- Driver Support
 - DAQPilot for LabVIEW™
 - DAQ-MTLB for MATLAB®
 - PCIS-DASK for Windows
 - PCIS-DASK/X for Linux

Specifications

Analog Output

- Resolution: 16 bits
- Number of channels: Four (simultaneous update)
- Maximum update rate: 1 MS/s
- FIFO buffer size: 8k Samples (4-CH Sharing)
- Output range: ± 10 V
- DNL: Less than ± 1 LSB
- Offset Error: 0.3 mV
- Positive Gain Error: 0.3 mV
- Negative Gain Error: 0.3 mV
- Settling Time: 3 μ s
- Slew Rate: 20 V/ μ s
- Rise Time: 0.67 μ s
- Falling Time: 0.705 μ s
- Output Current Capacity: 5 mA
- Trigger source: Software, External digital, SSI bus
- Data Transfer: Software polling, DMA

Isolated Digital Input

- Number of channels: 16
- Maximum input range: 24 V, non-polarity
- Digital logic level
 - Input high voltage: 10-24 V
 - Input low voltage: 0-1.5 V
- Isolation voltage: 2500 V_{RMS}

Isolated Digital Output

- Number of channels: 16
- Sink current limitation: 250 mA for one channel @ 100% duty
- Supply voltage: 5-35 V_{DC}
- Isolation voltage: 2500 V_{RMS}

Encoder Input

- Number of channels: Three Encoder type
 - CW/CCW encoder
 - x1 AB phase encoder
 - x2 AB phase encoder
 - x4 AB phase encoder

Function I/O

- Digital I/O: Eight DO (3.3 V TTL Level)/Eight DI (3.3 V or 5 V TTL Level)
- General Timer/Counter: Two 32-bit, Base clock: 80 MHz, external to 10 MHz
- Pulse Generation: Four PWM Outputs
 - Single pulse generation
 - Pulse train generation
- AF10/AF11: D/A Convert Clock or Start Trigger

General Specifications

- PCI Bus: 5 V and 3.3 V universal PCI bus
- I/O Connector: Two 68-pin SCSI-VHDCI female
- Operation temperature: 0°C to 55°C
- Storage temperature: -20°C to 70°C
- Relative humidity: 5% to 95%, non-condensing
- Power requirements:

+5 V	+12 V
500 mA typical	110 mA typical

- Dimensions: 175 mm x 107 mm (not including connectors)

Terminal Boards & Cables

DIN-68S-01

Terminal Board with One 68-pin SCSI-II connector and DIN-Rail Mounting (Cables are not included.)

ACL-10568-1

68-pin SCSI-VHDCI cable (mating with AMP-787082-7), 1 M

* For more information on mating cables, please refer to P2-61/62.

SSI Bus Cables

(for multiple cards synchronization)

ACL-SSI-2

SSI Bus cable for two devices

ACL-SSI-3

SSI Bus cable for three devices

ACL-SSI-4

SSI Bus cable for four devices

Ordering Information

PCI-6202

4-CH 16-Bit 1 MS/s Analog Output & 32-CH Isolation DIO Card

Pin Assignment

CN1				CN2			
DO_0	1	35	GPTC_OUT0	IDI_0	1	35	IDI_8
DO_1	2	36	GPTC_GATE0	IDI_1	2	36	IDI_9
DO_2	3	37	GPTC_UD0	IDI_2	3	37	IDI_10
DO_3	4	38	GPTC_AUX0	IDI_3	4	38	IDI_11
DO_4	5	39	GPTC_CLK0	IDI_4	5	39	IDI_12
DO_5	6	40	GPTC_OUT1	IDI_5	6	40	IDI_13
DO_6	7	41	GPTC_GATE1	IDI_6	7	41	IDI_14
DO_7	8	42	GPTC_UD1	IDI_7	8	42	IDI_15
DGND	9	43	GPTC_AUX1	COM	9	43	COM
DGND	10	44	GPTC_CLK1	COM	10	44	COM
DI_0	11	45	DGND	EA0+	11	45	EA1+
DI_1	12	46	DGND	EA0-	12	46	EA1-
DI_2	13	47	DGND	EB0+	13	47	EB1+
DI_3	14	48	DGND	EB0-	14	48	EB1-
DI_4	15	49	DGND	EZ0+	15	49	EZ1+
DI_5	16	50	DGND	EZ0-	16	50	EZ1-
DI_6	17	51	DGND	EORG0	17	51	EORG1
DI_7	18	52	DGND	EA2+	18	52	EZ2+
DGND	19	53	PWM_0	EA2-	19	53	EZ2-
DGND	20	54	PWM_1	EB2+	20	54	EORG2
DGND	21	55	PWM_2	EB2-	21	55	Ext. 24V
DGND	22	56	PWM_3	Ext. GND	22	56	Ext. 24V
DGND	23	57	AFI0	IGND	23	57	Ext. GND
AGND	24	58	AFI1	IGND	24	58	IGND
AGND	25	59	NC	VDD	25	59	IGND
AGND	26	60	AGND	VDD	26	60	ISO5V
AGND	27	61	AGND	IDO_0	27	61	IDO_8
AGND	28	62	AGND	IDO_1	28	62	IDO_9
AGND	29	63	AGND	IDO_2	29	63	IDO_10
AGND	30	64	AGND	IDO_3	30	64	IDO_11
AO_CH0	31	65	AGND	IDO_4	31	65	IDO_12
AO_CH1	32	66	AGND	IDO_5	32	66	IDO_13
AO_CH2	33	67	AGND	IDO_6	33	67	IDO_14
AO_CH3	34	68	AGND	IDO_7	34	68	IDO_15

PCI-6202 Block Diagram

