



# RPPL-SM-WTL Series

## DATA SHEET

### Outdoor Remote Power Systems

#### Features

- Complete Remote Power Solution for Off-Grid operation
- 4000+ Cycle Life @ 80% discharge LiFePO4 Lithium Batteries
- Weatherproof, UV resistant, outdoor enclosures
- Enclosures can be Wall or Pole Mounted
- Advanced battery charge controller and Embedded BMS for extended battery life

#### Applications

- Wireless Base Stations and Clients
- Surveillance Cameras
- Wireless Bridge and Repeaters
- Remote Sensors
- Remote Lighting
- Backup Power Systems



#### Description

The RemotePro® PL-SM-WTL series (RPPL) outdoor power systems are designed for applications that require a primary off-grid or backup power source to run various electronics. The sealed and weatherproof 11x7x6" Polycarbonate enclosures hold up to two 12V 10AH batteries. The enclosures are hinged and gasket sealed. They can accept a padlock or tamper seal.

The enclosures can be mounted to a wall or pole with the included mounting bracket system.

The high quality solar panels have a 25year power output guarantee. The solar panels can be mounted to a 51mm to 101mm (2" to 4") diameter pole or alternately to a wall with the included bracket kit.

Features include advanced battery charge controllers with LVD load control. Some of the RPPL-SM-WTL systems include a controller with built in POE inserter and DCDC converter to supply 24V or 48V PoE from the 12V or 24V battery system. Other models use a 20A PWM controller with parametric LCD display. Enclosures have multiple ports for CAT5/6 cable, antenna cables/connectors or other cabling.


Batteries are a wide temp LFP (LiFePO4) Lithium type which have superb 80% deep discharge and 4000+ cycle life performance. The batteries have an embedded BMS (Battery Management System) to enable 10+ year battery life.



Solar Mount



20A PWM Controller Inside

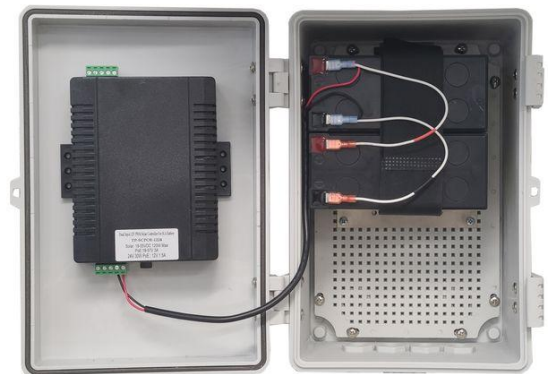

10A Solar, 30W PoE Controller Inside

## Specifications

	RPPL12-10L-15	RPPL12-10L-50	RPPL12-20L-50	RPPL24-20L-50	RPPL1224-20L-50	RPPL1248-20L-50	RPPL2424-20L-50	RPPL2448-20L-50
<b>Passive PoE Out (30W)</b>	---	---	---	---	24V	48V	24V	48V
<b>Secondary Volts Out (DC)</b>	12V 20A			24V 20A	12V 1.5A		24V 1.5A	
<b>Battery Capacity (Amp Hrs)</b>	10Ah	20Ah						
<b>Battery Voltage (DC)</b>	12V			24V	12V		24V	
<b>Battery Type</b>	Wide Temp LFP (LiFePO4) Lithium							
<b>Battery Life</b>	10 Years							
<b>Controller Type</b>	PWM				Dual Input: Solar/POE, Dual Output: Battery Voltage/POE with DCDC Converter			
<b>Overcharge Protection</b>	14.4V			28.6V	14.4V			
<b>Over-discharge protection</b>	11.0V			22.0V	11.0V			
<b>Over-discharge recovery volts</b>	12.5V			24.5V	12.5V			
<b>Controller Self Consumption</b>	< 0.5W							
<b>Enclosure Type</b>	UV Protected Polycarbonate							
<b>Enclosure External Size</b>	12 x 8.5 x 7" (305 x 216 x 178mm)							
<b>Enclosure Internal Size</b>	11 x 7 x 6" (279 x 178 x 152mm)							
<b>Solar Panel Dims</b>	14.6 X 14.2" (370 x 360mm)		16 X 24.4" (405 x 620mm)					
<b>Operating Temperature</b>	-30°C to +60°C (-22°F to 140°F)							
<b>System Weight (no batteries)</b>	11lb (5kg)			17lb (8kg)				
<b>Battery Weight</b>	2.2lb (1kg)			4.4lb (2kg)				
<b>Wind Speed Rating</b>	110MPH (49m/s)							
<b>Warranty</b>	3 Years							

## System Ordering:

Model #	Continuous Power Generation*	Reserve Time	Enclosure Type	Battery Voltage	PoE Output Voltage	Battery Capacity	Solar Panel Size
RPPL12-10L-20	3.75W	24hrs	Polycarbonate	12VDC	---	10Ah	20W
RPPL12-10L-50	3.75W	24hrs	Polycarbonate	12VDC	---	10Ah	50W
RPPL12-20L-50	7.5W	24hrs	Polycarbonate	12VDC	---	20Ah	50W
RPPL1224-20L-50	7.5W	24hrs	Polycarbonate	12VDC	24V	20Ah	50W
RPPL1248-20L-50	7.5W	24hrs	Polycarbonate	12VDC	48V	20Ah	50W
RPPL24-20L-50	7.5W	24hrs	Polycarbonate	24VDC	---	20Ah	50W
RPPL2424-20L-50	7.5W	24hrs	Polycarbonate	24VDC	24V	20Ah	50W
RPPL2448-20L-50	7.5W	24hrs	Polycarbonate	24VDC	48V	20Ah	50W

\*6hrs peak sun

**Note:** The Wide Temp Lithium batteries used in these systems are designed for operation in -30C to +60C environments making them perfect for year round outdoor use in all climates.

For further information contact:

[Tyconsystems.com](http://Tyconsystems.com)



930 W 14600 S Ste 600  
Bluffdale, UT 84065  
PH: 801-432-0003  
FAX: 801-618-4220