

WISE-6610

Industrial LoRaWAN Gateway



Features

- Long-range wide area IoT gateway
- LoRaWAN protocol for closed and public system application
- Ethernet and I/O for connecting a wide array of field assets
- DIN rail and wall mounting design
- Low power consumption for solar and battery power applications
- Enhanced memory for hosting custom software applications
- Redundancy-enhanced functions for continuous data transmission

Introduction

The WISE-6610 is a high-performance LoRaWAN gateway that offers reliable connectivity for industrial environments. It supports the LoRaWAN protocol for building LoRaWAN private and public networks, as well as various protocols including MQTT. The hardware and software flexibility of the WISE-6610 provides rich features for edge intelligence systems, and its support for VPN tunneling with various protocols ensures safe communications. The WISE-6610 also provides a network server that can phase the LoRaWAN data in our device. The WISE-6610 provides the redundancy-enhanced functions to prevent connection loss.

Specifications

WSN Support

- Standard LoRaWAN
- Frequency 868/915 MHz
- ANT Connector RP-SMA Male connector x 1

LAN Interface

- Ethernet 10/100 Mbps, auto MDI/MDIX
- Connector 1 x RJ45
- Protection 1.5-kV built-in magnetic isolation protection

Digital I/O

- Port Type 1x Digital Input On Voltage: 2.7V to 36V_{DC}
- Port Connector 4-way Molex mini-fit connector

General

- LED Indicators PWR, DAT, WAN, ETH
- Reboot Trigger Reset button

Software

- Network and Routing DHCP server, NAT/PAT, VRRP, dynamic DNS client, DNS proxy, VLAN, QoS, DMVPN, NTP client/server, IGMP, BGP, OSPF, RIP, SMTP, SMTPL, SNMP v1/v2c/v3, backup routers, PPP, PPPoE, SSL, port forwarding, host port routing, Ethernet bridging, network server
- Configuration SSH, Web Browser
- Network Security HTTPS, SSH, VPN tunnels, SFTP, DMZ, firewall (IP filtering, MAC address filtering, inbound/outbound port filtering)
- VPN tunnelling Open VPN client and server and P2P, L2TP, PPTP, GRE, EasyVPN, IPSec with IKEv1 and IKEv2

Mechanics

- Dimensions (W x H x D) 150 x 37.5 x 83 mm (5.9" x 1.48" x 3.27")
- Mounting DIN rail, wall
- Weight 500g
- Enclosure Rating IP30

Power Requirements

- Power Input 9 ~ 36 V_{DC}
- Power Connector 4-way Molex mini-fit connector
- Power Consumption 3.1/6.6/40 mW (average/peak/sleep mode)


Environment

- Operating Temperature -40 ~ 75°C
- Storage Temperature -40 ~ 85°C
- Operating Humidity 10 ~ 95% RH

Regulatory Approvals

- EMC EN61000-4-2, Level 3
EN61000-4-3, Level 3
EN61000-4-4, Level 3
EN61000-4-5, Level 3
EN61000-4-6, Level 3
EN61000-4-12, Level 3
EN61000-4-11, voltage dip: 70%
- Shock IEC 60068-2-27
- Free Fall IEC 60068-2-32
- Vibration IEC 60068-2-6

Dimensions

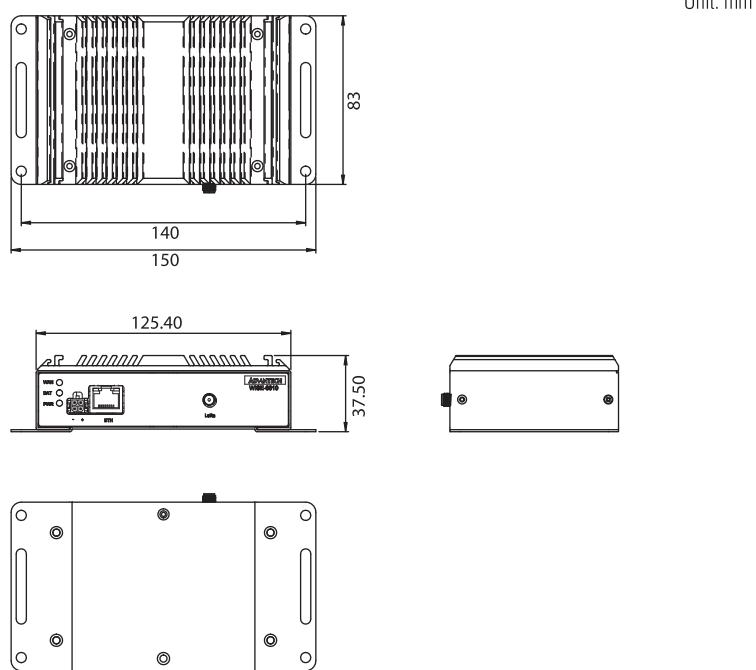

Ordering Information

- **WISE-6610-N100-A** LoRaWAN gateway supports up to 100 nodes with 915 MHz
- **WISE-6610-E100-A** LoRaWAN gateway supports up to 100 nodes with 868 MHz
- **WISE-6610-A100-A** LoRaWAN gateway supports up to 100 nodes with 923 MHz
- **WISE-6610-N500-A** LoRaWAN gateway supports up to 500 nodes with 915 MHz
- **WISE-6610-E500-A** LoRaWAN gateway supports up to 500 nodes with 868 MHz
- **WISE-6610-A500-A** LoRaWAN gateway supports up to 500 nodes with 923 MHz